



haus.

whisper

A I R E N G I N E E R E D

head office.

Haus Group Australia Pty Ltd
2/2 Network Drive
CARRUM DOWNS Victoria Australia 3201

Australia.

t. (AU) 03 8593 9600 f. (AU) 03 8593 9699
e. info@hausgroup.com.au
w. www.hausgroup.com.au

New Zealand.

t. (NZ) 09 887 6959 f. (NZ) 09 887 6958
e. info@hausgroup.co.nz
w. www.hausgroup.co.nz



**IT'S COMPLEX
YET SO SIMPLE.**

**INNOVATION.
DESIGN.
PERFORMANCE.
IT'S WHISPAIR.**


Finding the balance between superior air movement and low levels of noise can be difficult to manage. Whispair, an Australian brand that specialises in the design of premium quality rangehood systems, utilises revolutionary technology called KleanAir, that doesn't rely on finding a balance between air movement and noise.

With Whispair you have the choice between two motor types - on board or remote. The traditional on-board solution housed within the hood itself is available in two sizes whilst the remote motor solution completely removes the powerful fan from the range hood and places it away from the kitchen, considerably reducing operating noise whilst still achieving high levels of extraction performance.

A rangehood is designed to extract heat, steam, grease and odour from your kitchen environment. Whispair's innovative KleanAir technology takes this process to a new level of performance, making it different from most others. **It works.**

whispair

**INNOVATIVE DESIGN
ISN'T ALWAYS
OBVIOUS.**

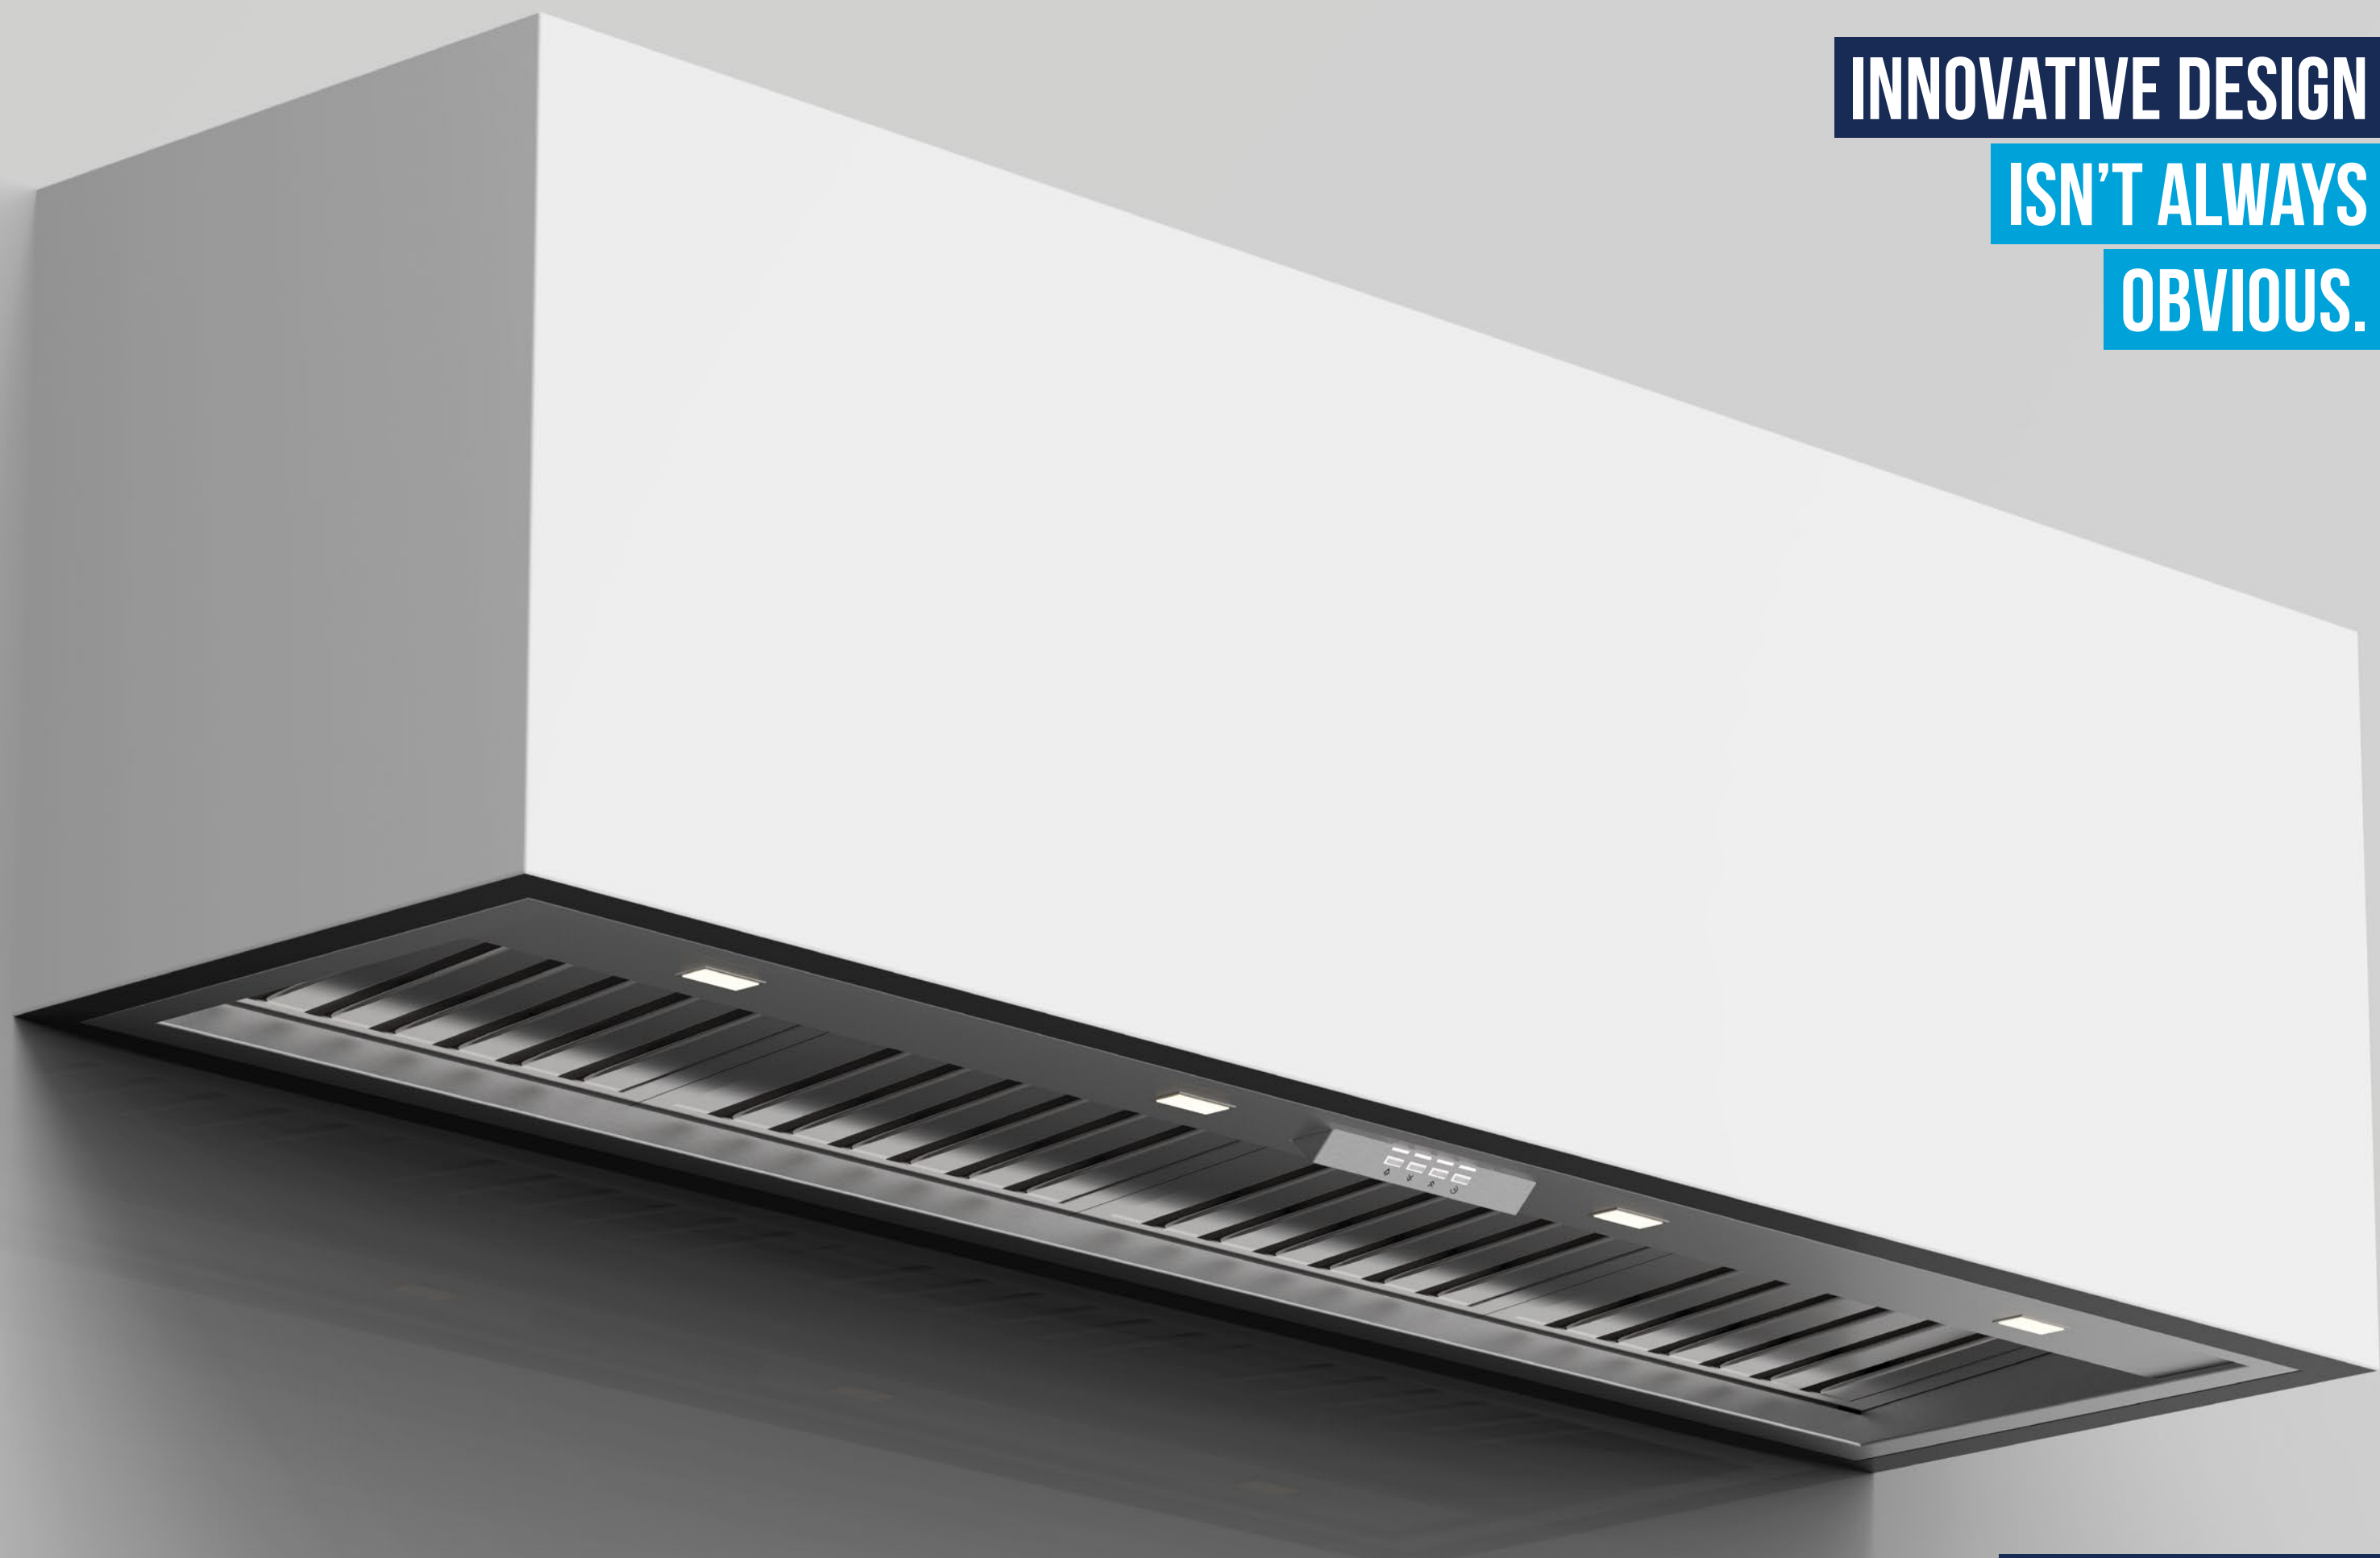

UNDERMOUNT HOODS


whisper



Product Features	
Hood Mounting	Built In (Under Mount)
Cooking Coverage	Suits 50cm - 75cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 2x (H-25) - Dishwasher Safe
Lighting	LED 2x (1.0W)
Finish	AISI304 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	560mm
Hood Depth	280mm
Hood Height	330mm (Plus 25mm Top Outlet)



Filtration Zone	
Dimensioned Drawing	

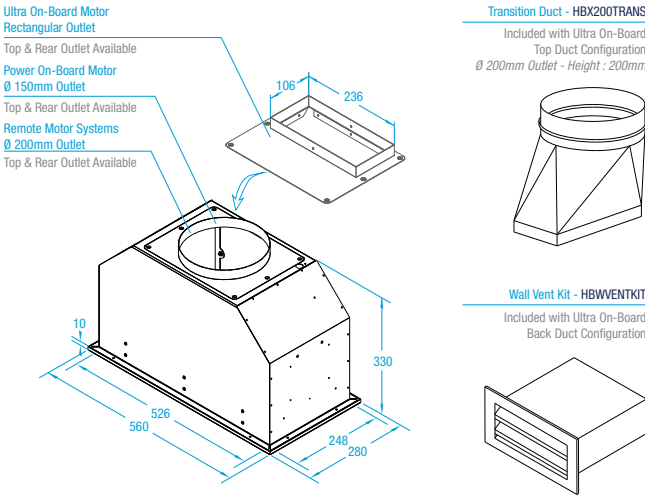

Model / Extraction Unit Selection			
X3M06S5.IL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X3M06S5.EL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3M06S5.IP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X3M06S5.EP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3M06S5.OP/T	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X3M06S5.OP/B	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X3M06S6.OU/T	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X3M06S6.OU/B	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)




Product Features	
Hood Mounting	Built In (Under Mount)
Cooking Coverage	Suits 70cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 4x (1.0W)
Finish	AISI304 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	860mm
Hood Depth	280mm
Hood Height	330mm (Plus 25mm Top Outlet)




Model / Extraction Unit Selection			
X3M09S5.IL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X3M09S5.EL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3M09S5.IP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X3M09S5.EP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3M09S5.EPP	Built In Hood	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3M09S5.OP/T	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X3M09S5.OP/B	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X3M09S6.OU/T	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X3M09S6.OU/B	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)


Filtration Zone	
Dimensioned Drawing	

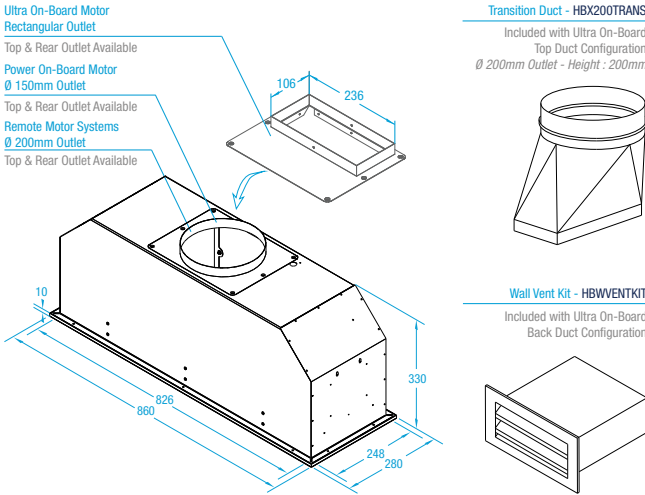

MONTE CARLO 90 SUPER DEEP

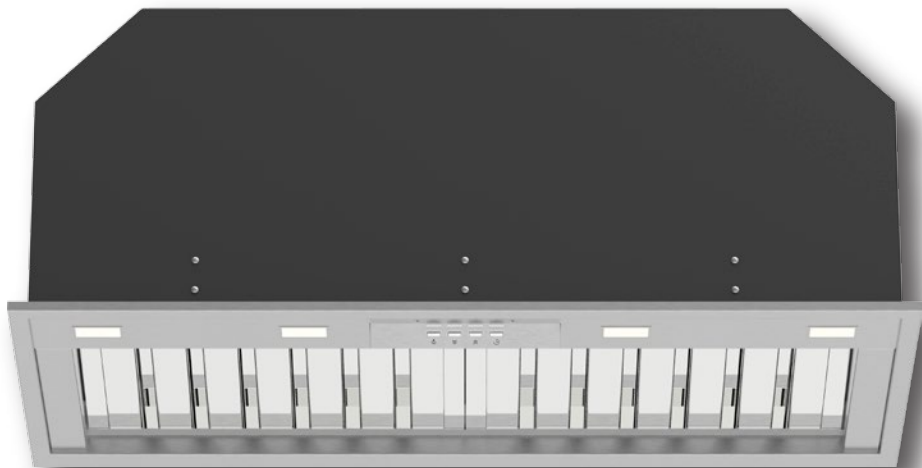


Product Features	
Hood Mounting	Built In (Under Mount)
Cooking Coverage	Suits 80cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 2x (H-25) - Dishwasher Safe
Lighting	LED 4x (1.0W)
Finish	AISI304 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	860mm
Hood Depth	380mm
Hood Height	330mm (Plus 25mm Top Outlet)

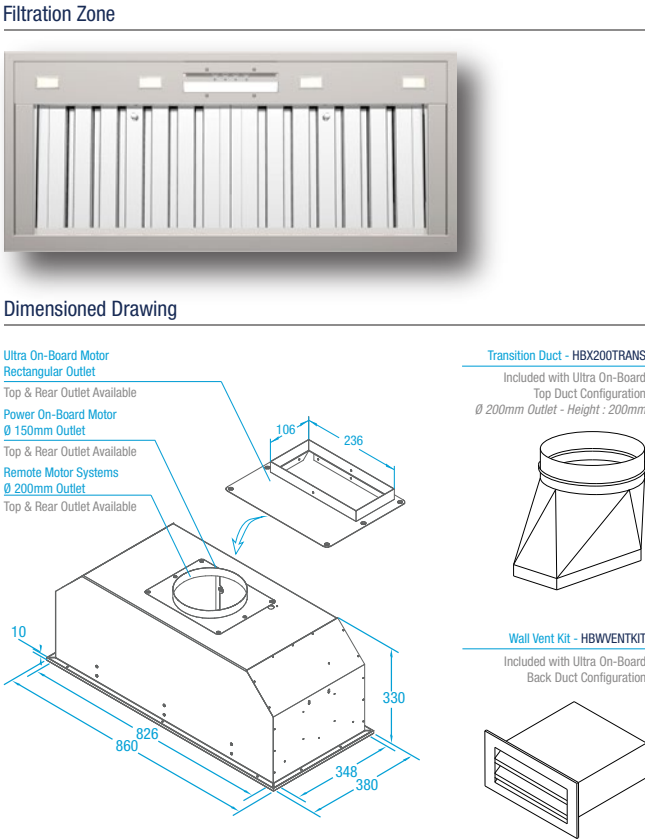


Model / Extraction Unit Selection			
X3MD09S5.IL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X3MD09S5.EL	Built In Hood	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3MD09S5.IP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X3MD09S5.EP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3MD09S5.EPP	Built In Hood	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3MD09S5.OP/T	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X3MD09S5.OP/B	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X3MD09S6.OU/T	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X3MD09S6.OU/B	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)

MONTE CARLO 120 SUPER DEEP

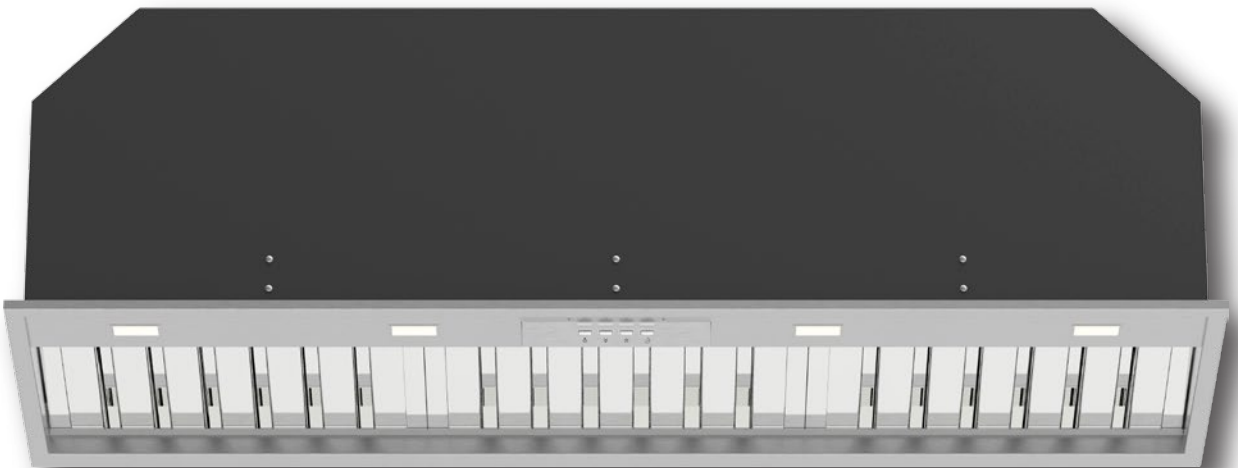


Product Features	
Hood Mounting	Built In (Under Mount)
Cooking Coverage	Suits 100cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 4x (1.0W)
Finish	AISI304 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	1160mm
Hood Depth	380mm
Hood Height	330mm (Plus 25mm Top Outlet)

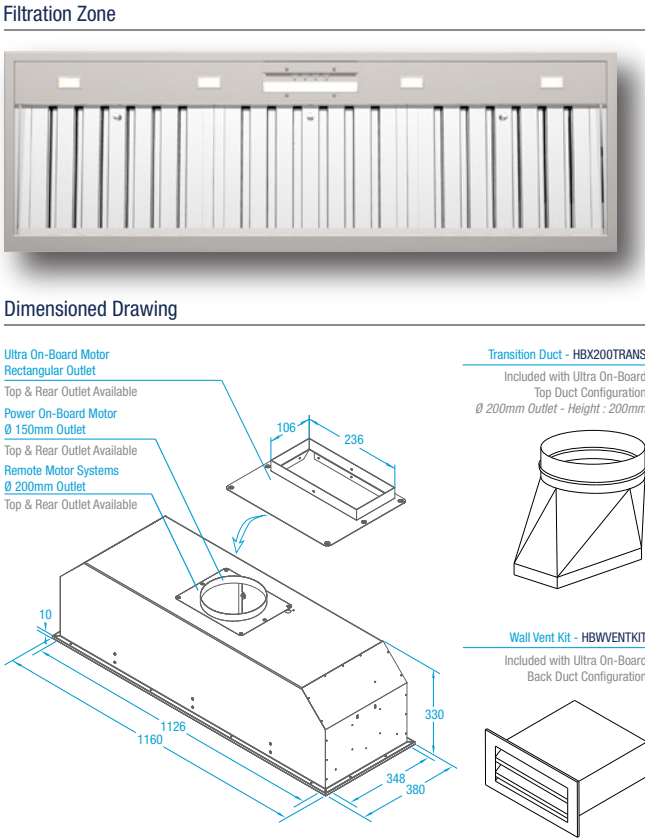


Model / Extraction Unit Selection			
X3MD12S5.IP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X3MD12S5.EP	Built In Hood	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3MD12S5.EPP	Built In Hood	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X3MD12S5.OP/T	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X3MD12S5.OP/B	Built In Hood	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X3MD12S6.OU/T	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X3MD12S6.OU/B	Built In Hood	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)

MONTE CARLO 160 SUPER DEEP

SPECIAL ORDER

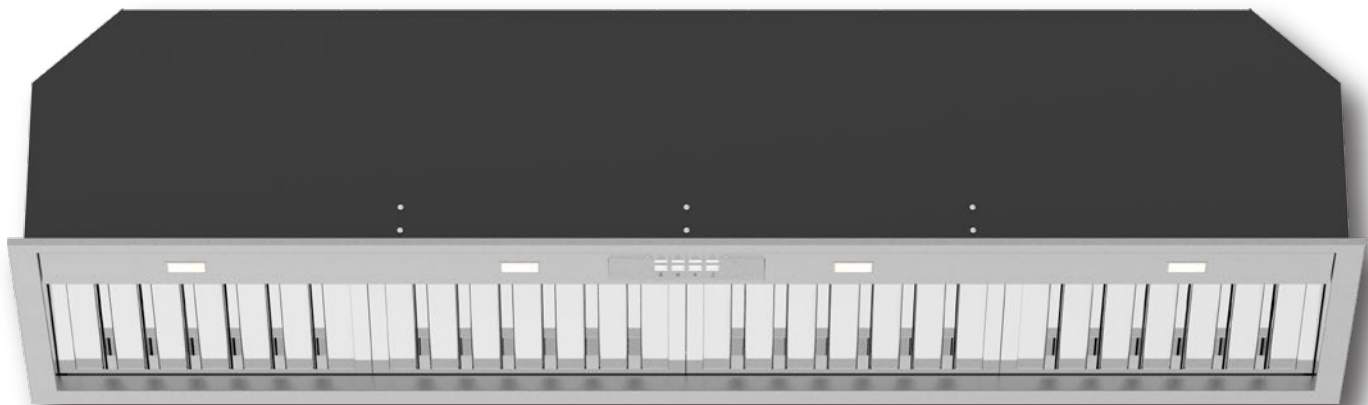

Product Features	
Hood Mounting	Built In (Under Mount)
Cooking Coverage	Suits 120cm - 170cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 4x (H-25) - Dishwasher Safe
Lighting	LED 4x (1.0W)
Finish	AISI304 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (2x Supplied)
Hood Width	1560mm
Hood Depth	380mm
Hood Height	330mm (Plus 25mm Top Outlet)

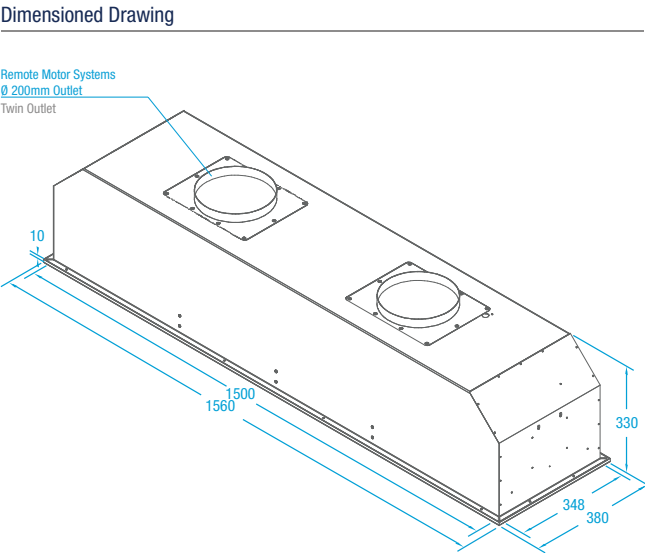

Model / Extraction Unit Selection			
X3MD16S5.2IP	S	Built In Hood	“Twin” KleanAir Pro Remote Fan Solution - 1140 m³/hr
X3MD16S5.2EP	S	Built In Hood	“Twin” KleanAir Pro Remote Fan Solution - 1140 m³/hr
X3MD16S5.2EPP	S	Built In Hood	“Twin” KleanAir Pro Plus Remote Fan Solution - 2010 m³/hr
		Remote Inline Motor System	
		Remote External (Roof or Wall Mounted) Motor System	
		Remote External (Roof or Wall Mounted) Motor System	

S Special Order - Delivery Time Approx. 8 weeks from Order.

WHISPAIR COMBINES
PREMIUM EXTRACTION AND
LOW NOISE LEVELS.





WALL HUNG CANOPY HOODS







Product Features	
Hood Mounting	Wall Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	500mm
Hood Height (Fascia)	50mm / 250mm (Flare Angle Height)

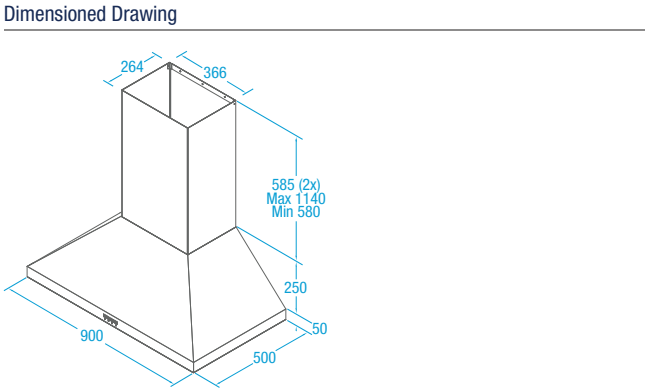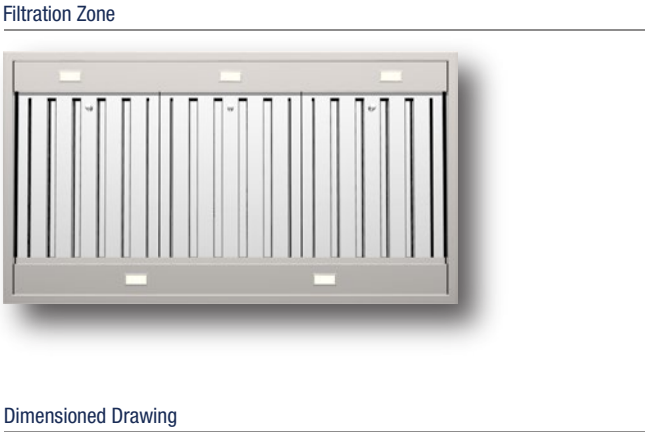

Model / Extraction Unit Selection			
X5L09S5.IL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X5L09S5.EL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5L09S5.IP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X5L09S5.EP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5L09S5.EPP	Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5L09S5.OP/T	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X5L09S5.OP/B	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X5L09S6.OU/T	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X5L09S6.OU/B	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)




Product Features	
Hood Mounting	Wall Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	500mm
Hood Height (Fascia)	75mm

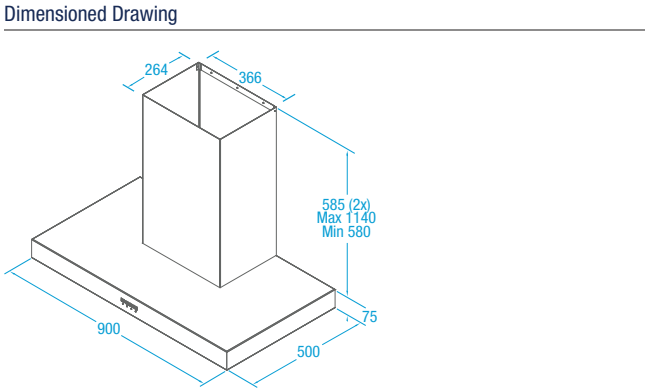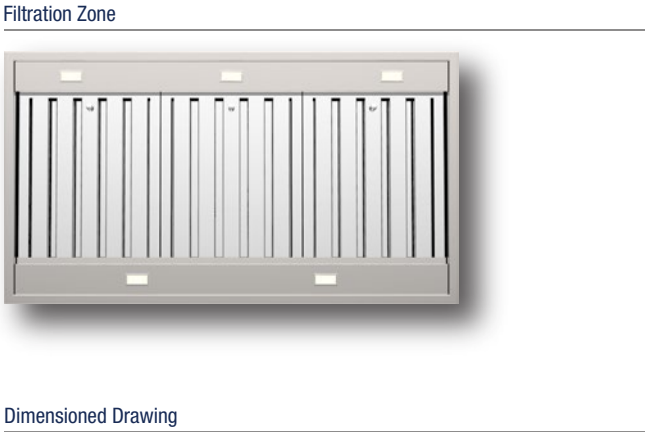

Model / Extraction Unit Selection			
X5S09S5.IL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X5S09S5.EL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5S09S5.IP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X5S09S5.EP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5S09S5.EPP	Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5S09S5.OP/T	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X5S09S5.OP/B	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X5S09S6.OU/T	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X5S09S6.OU/B	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)


ROME 90 - BLACK FASCIA

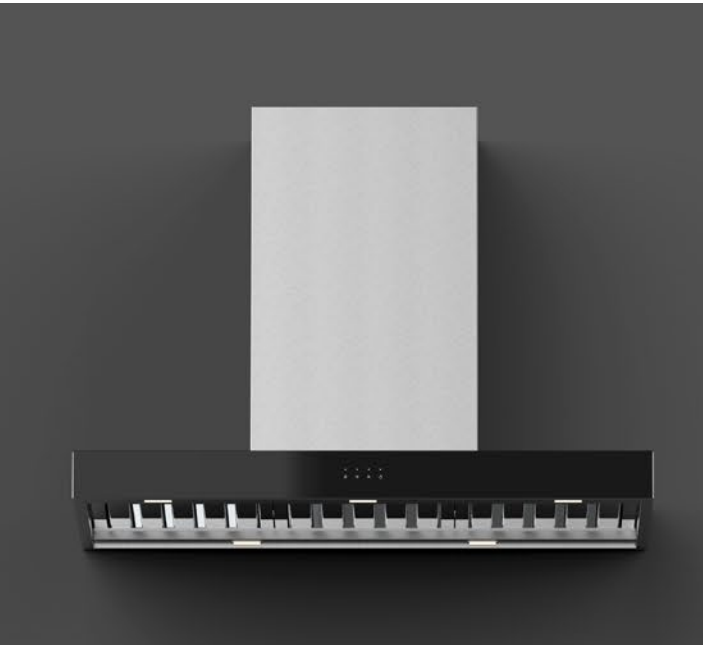


BLACK GLASS FASCIA

Product Features	
Hood Mounting	Wall Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Touch Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	500mm
Hood Height (Fascia)	75mm

Filtration Zone

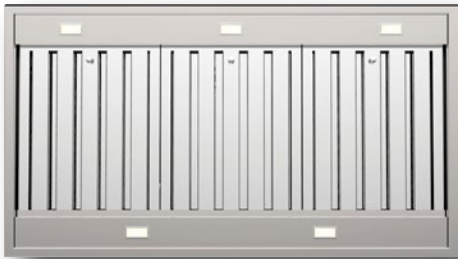


Dimensioned Drawing

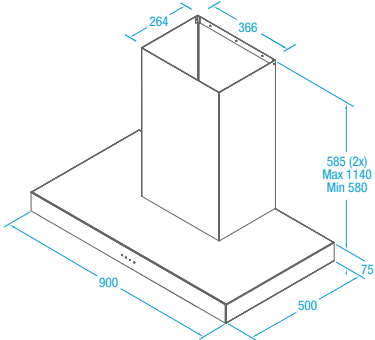

Model / Extraction Unit Selection

X5R09S5.IL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X5R09S5.EL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09S5.IP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X5R09S5.EP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09S5.EPP	Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09S5.OP/T	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X5R09S5.OP/B	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X5R09S6.OU/T	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X5R09S6.OU/B	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)


ROME 90 - WHITE FASCIA

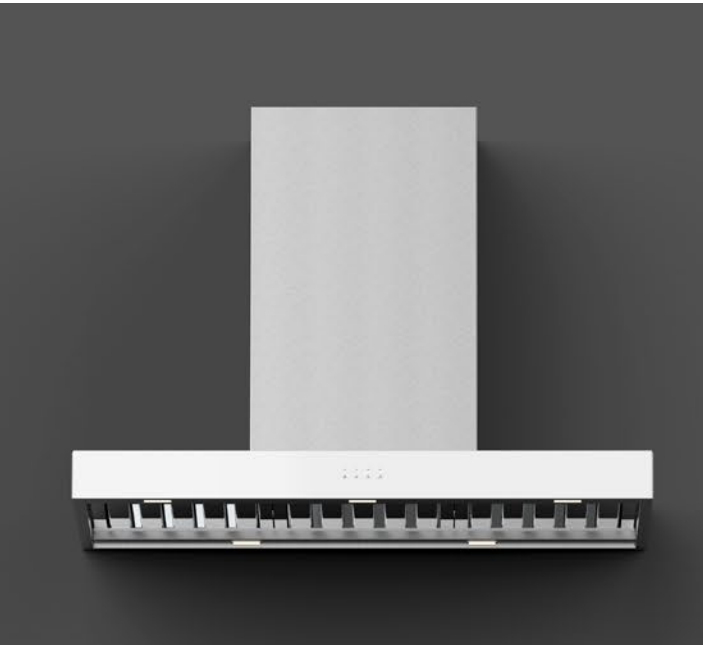


WHITE GLASS FASCIA

Product Features	
Hood Mounting	Wall Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Touch Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	500mm
Hood Height (Fascia)	75mm

Filtration Zone

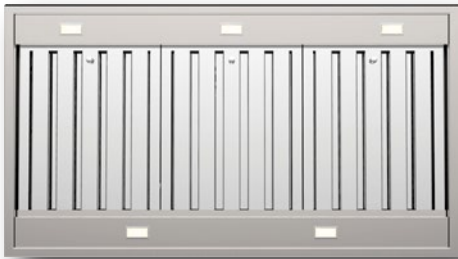

Dimensioned Drawing

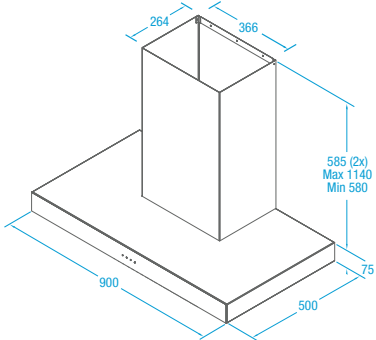


Model / Extraction Unit Selection

X5R09W5.IL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X5R09W5.EL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09W5.IP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X5R09W5.EP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09W5.EPP	Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5R09W5.OP/T	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X5R09W5.OP/B	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X5R09W6.OU/T	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X5R09W6.OU/B	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)




Product Features	
Hood Mounting	Wall Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	500mm
Hood Height (Fascia)	120mm

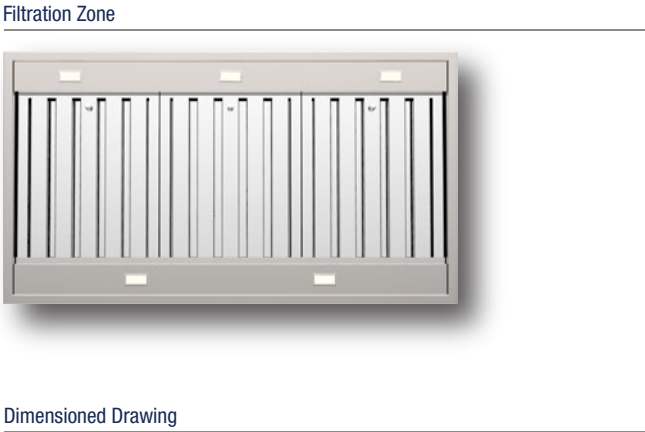

Model / Extraction Unit Selection			
X5V09S5.IL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote Inline Motor System
X5V09S5.EL	Wall Hung Canopy	KleenAir Lite Remote Fan Solution - 800 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5V09S5.IP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X5V09S5.EP	Wall Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5V09S5.EPP	Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X5V09S5.OP/T	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X5V09S5.OP/B	Wall Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Back Ducted (150mm Outlet)
X5V09S6.OU/T	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)
X5V09S6.OU/B	Wall Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Back Ducted (Inc. Wall Vent Kit)

BEAUTIFUL DESIGN
MEETS REVOLUTIONARY
PERFORMANCE.


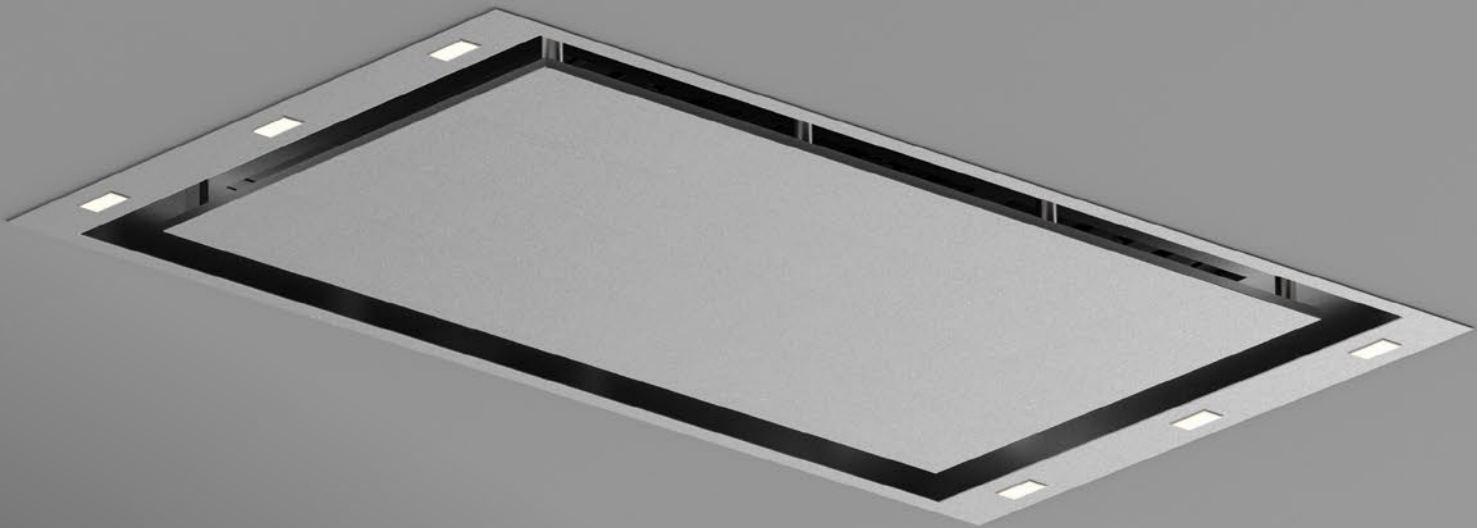


ISLAND HUNG HOODS & CEILING CASSETTES

STOCKHOLM 90 ISLAND



Product Features	
Hood Mounting	Island Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 6x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	600mm
Hood Height (Fascia)	75mm

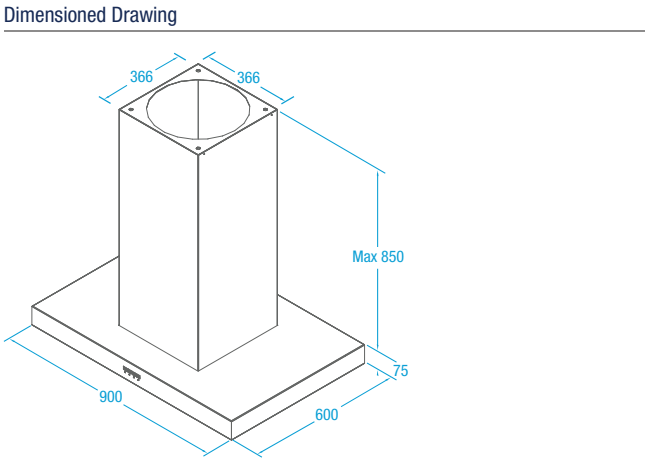
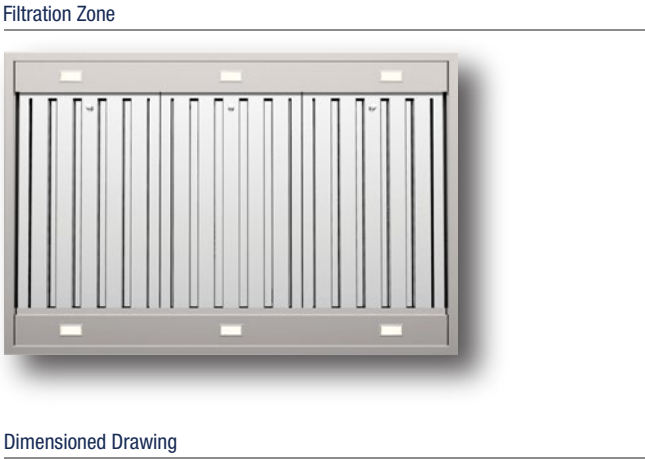


Model / Extraction Unit Selection			
X7S09S5.IP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X7S09S5.EP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7S09S5.EPP	Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7S09S5.OP/T	Island Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X7S09S6.OU/T	Island Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)

ROME 90 ISLAND - BLACK FASCIA



Product Features	
Hood Mounting	Island Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 6x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Touch Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	600mm
Hood Height (Fascia)	75mm

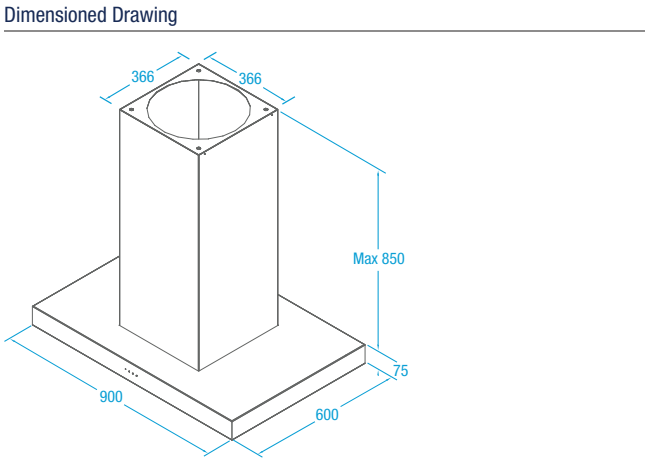
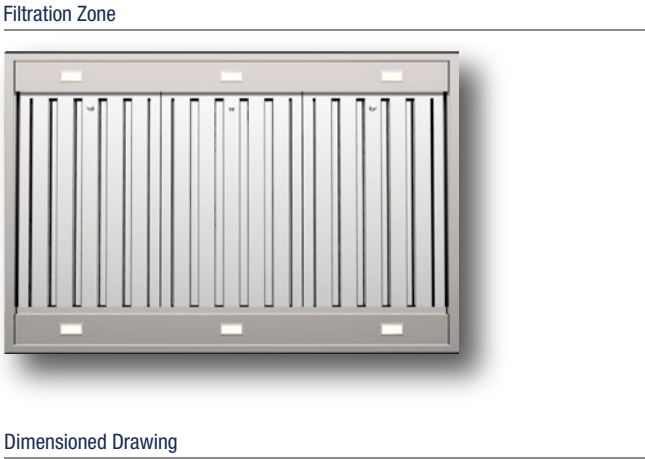


Model / Extraction Unit Selection			
X7R09S5.IP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X7R09S5.EP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7R09S5.EPP	Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7R09S5.OP/T	Island Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X7R09S6.OU/T	Island Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)

ROME 90 ISLAND - WHITE FASCIA



Product Features	
Hood Mounting	Island Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 6x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Touch Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	600mm
Hood Height (Fascia)	75mm

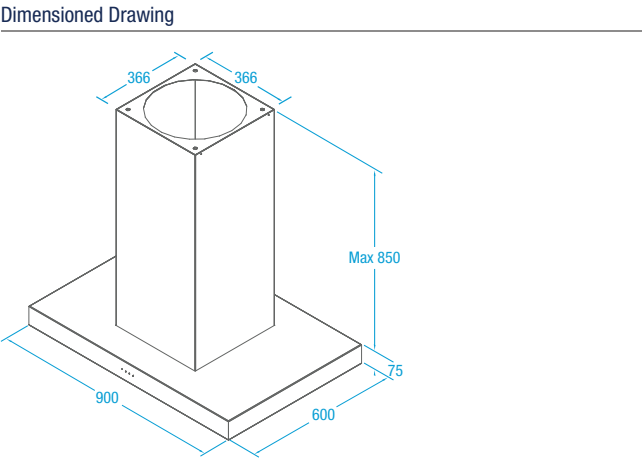
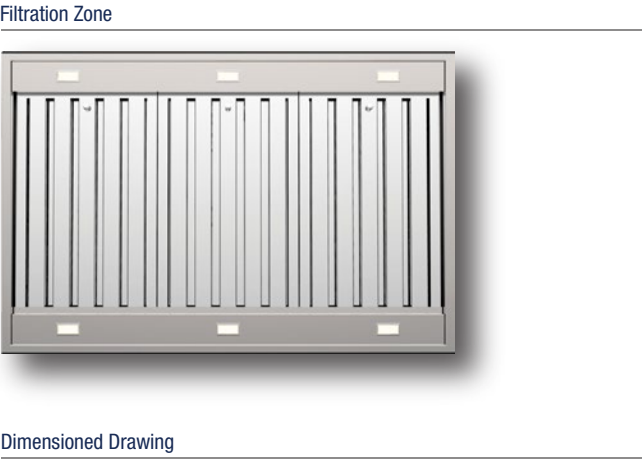


Model / Extraction Unit Selection			
X7R09W5.IP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X7R09W5.EP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7R09W5.EPP	Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7R09W5.OP/T	Island Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X7R09W6.OU/T	Island Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)

VIENNA 90 ISLAND




Product Features	
Hood Mounting	Island Hung
Cooking Coverage	Suits 75cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 6x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	900mm
Hood Depth	600mm
Hood Height (Fascia)	120mm

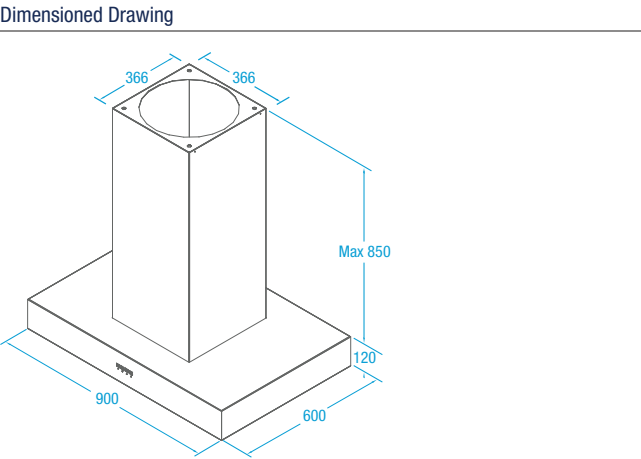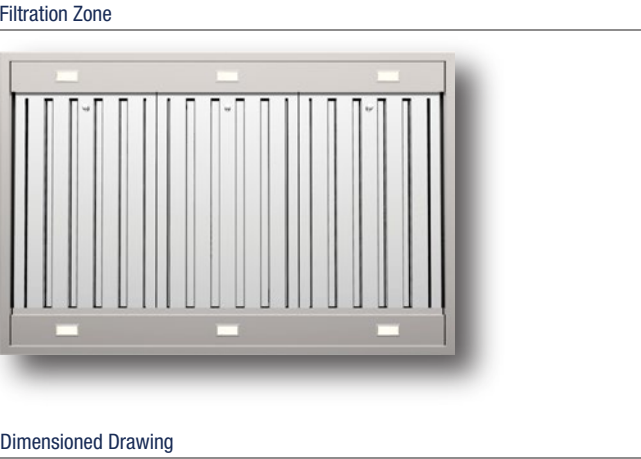

Model / Extraction Unit Selection			
X7V09S5.IP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote Inline Motor System
X7V09S5.EP	Island Hung Canopy	KleenAir Pro Remote Fan Solution - 1140 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7V09S5.EPP	Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
X7V09S5.OP/T	Island Hung Canopy	KleenAir Power On Board Fan Solution - 1020 m³/hr	On-Board Motor System - Top Ducted (150mm Outlet)
X7V09S6.OU/T	Island Hung Canopy	KleenAir Ultra EC On Board Fan Solution - 1680 m³/hr	On-Board Motor System - Top Ducted (Inc. Transition Duct)

COPENHAGEN 120


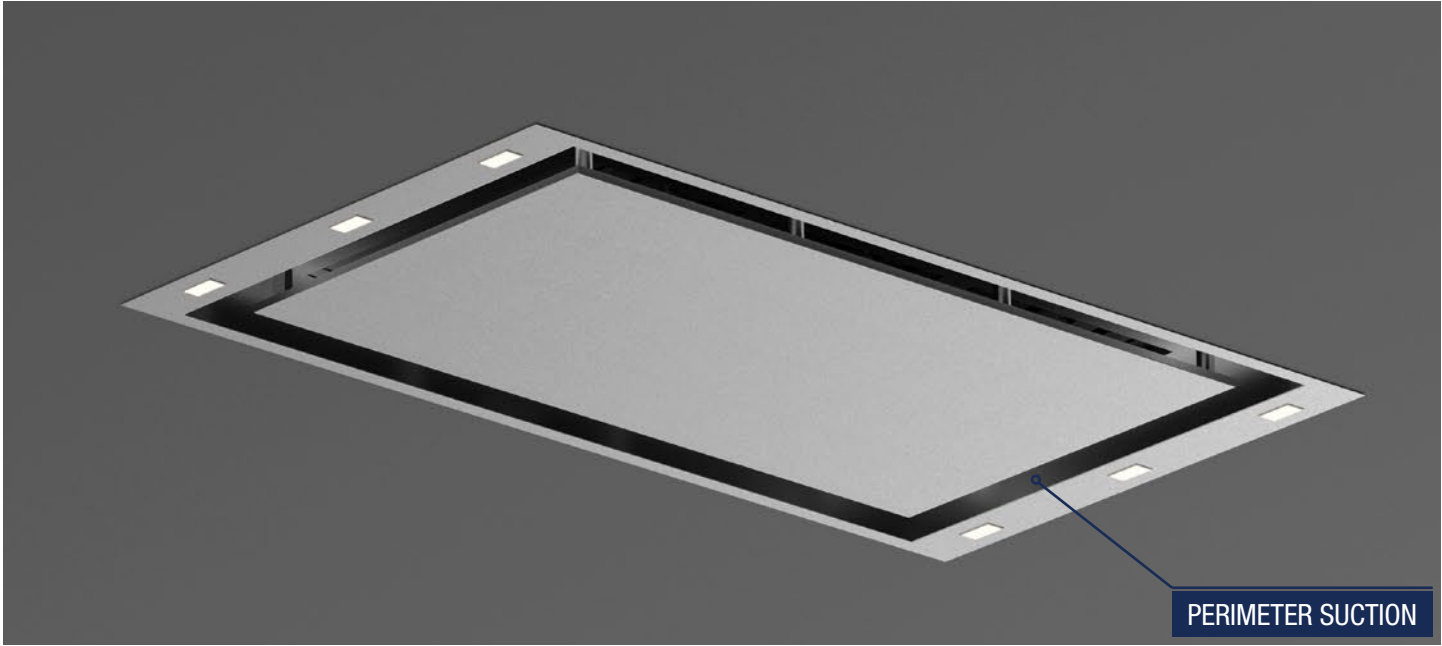


Product Features	
Hood Mounting	Ceiling Mount
Cooking Coverage	Suits 75cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 6x (1.0W)
Finish	AISI304 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied only with Remote Motors)
Hood Width	1200mm
Hood Depth	680mm
Hood Height (Fascia)	152mm (plus 25mm Top Outlet)





Wireless Remote Control Included

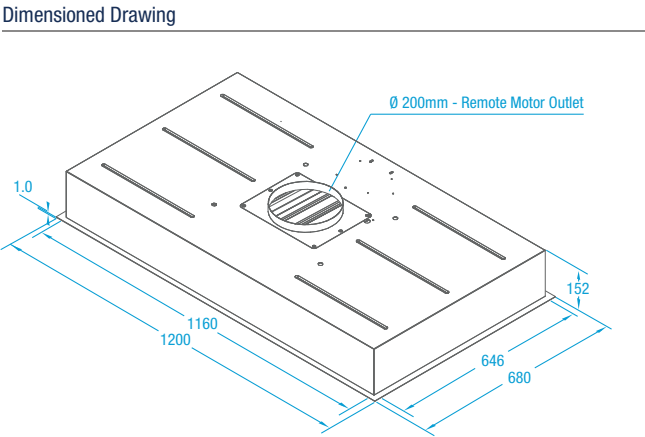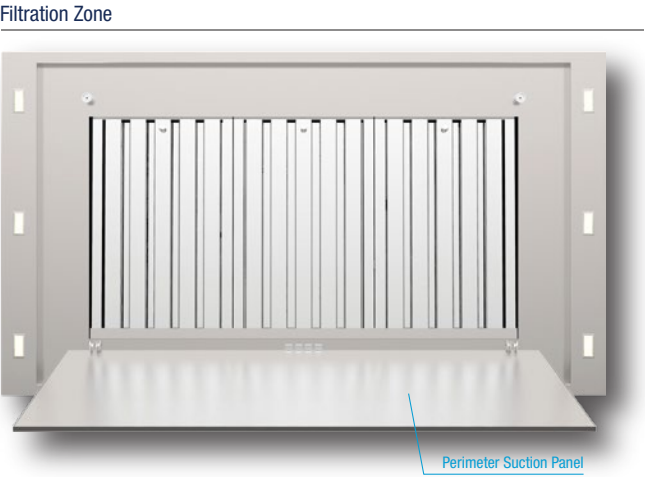

BEAUTIFUL CRAFTSMANSHIP.
WHISPAIR MAKES IT
BETTER.

Model / Extraction Unit Selection			
X9C12S5.EPP	Ceiling Cassette	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System

WHISPAIR DELIVERS

A RANGE OF ALFRESCO

HOODS WHERE THE

DIFFERENCES MATTER.

AISI316 MARINE GRADE
STAINLESS STEEL.


INCREASED HOOD COVERAGE.

COMMERCIAL GRADE BAFFLE FILTRATION.

WIRELESS MASTERMIND CONTROLLER.

LED LIGHTING.

WASHINGTON 120

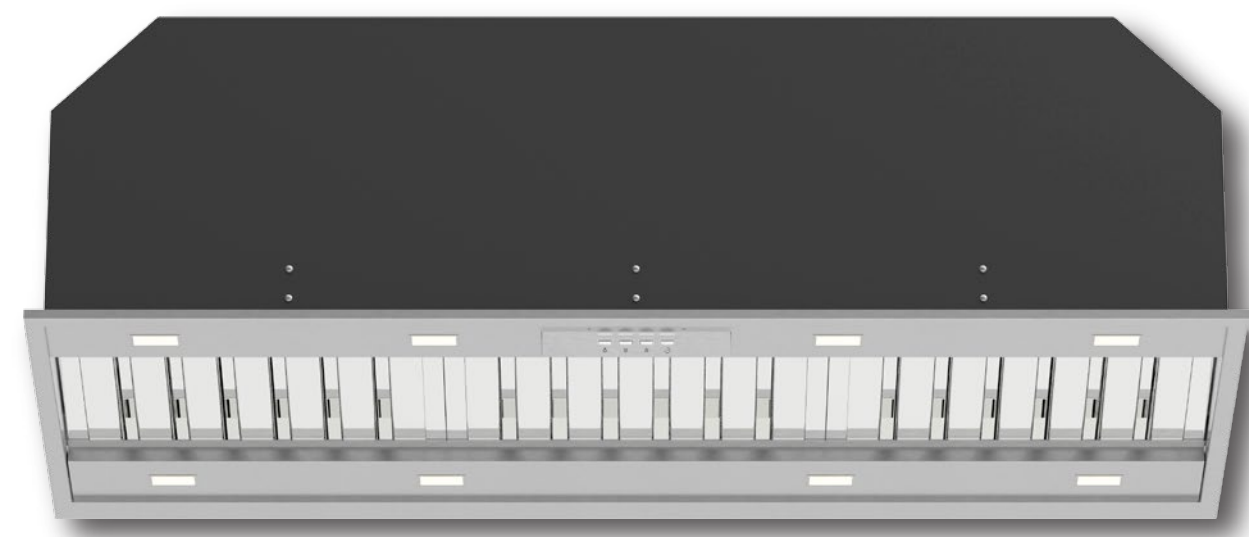

Product Features


Hood Mounting	Alfresco Built In (Under Mount)
Cooking Coverage	Suits 100cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 8x (1.0W)
Finish	AISI316 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length
Hood Width	1160mm
Hood Depth	480mm
Hood Height	330mm (Plus 25mm Top Outlet)



Filtration Zone



Dimensioned Drawing

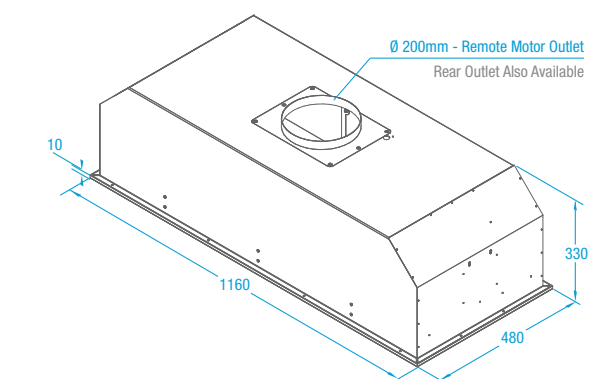

Model / Extraction Unit Selection


X3W12S5.EPP

Alfresco Built In Hood

KleenAir **Pro Plus** Remote Fan Solution - 2010 m³/hr

Remote **External** (Roof or Wall Mounted) Motor System

whispair

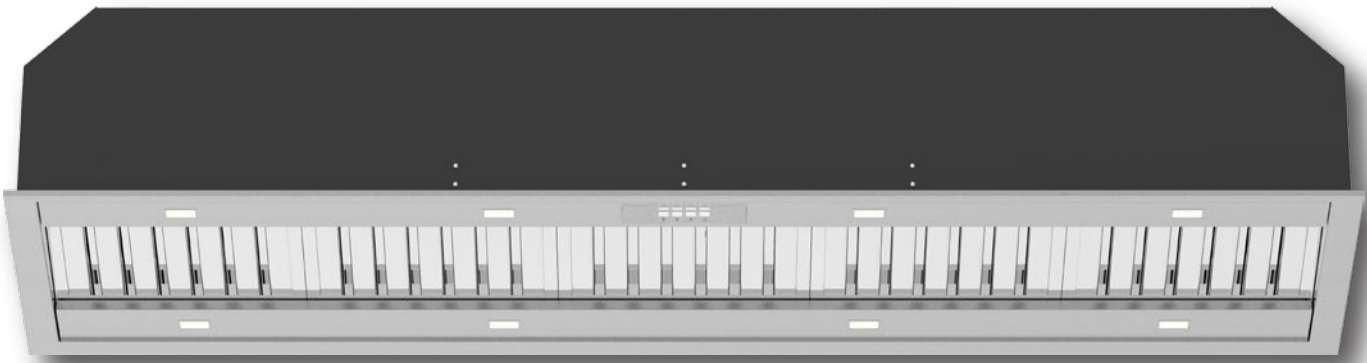

Product Features	
Hood Mounting	Alfresco Built In (Under Mount)
Cooking Coverage	Suits 150cm - 200cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 5x (H-25) - Dishwasher Safe
Lighting	LED 8x (1.0W)
Finish	AISI316 1.2mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length (2x Supplied)
Hood Width	1960mm
Hood Depth	480mm
Hood Height (Fascia)	330mm (Plus 25mm Top Outlet)






Filtration Zone



Dimensioned Drawing

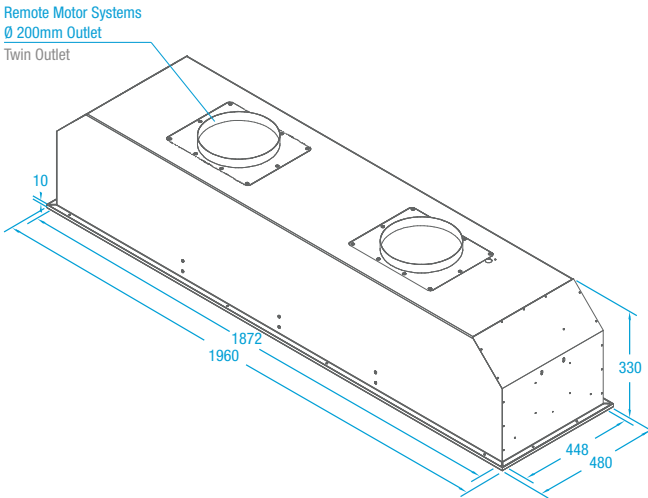

Model / Extraction Unit Selection			
X3W20S5.2EPP	S	Alfresco Built In Hood “Twin” KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System
S Special Order - Delivery Time Approx. 8 weeks from Order.			




Product Features	
Hood Mounting	Alfresco Wall Hung
Cooking Coverage	Suits 80cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI316 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length
Hood Width	1000mm
Hood Depth	750mm
Hood Height (Fascia)	120mm / 350mm (Flare Angle Height)






Filtration Zone

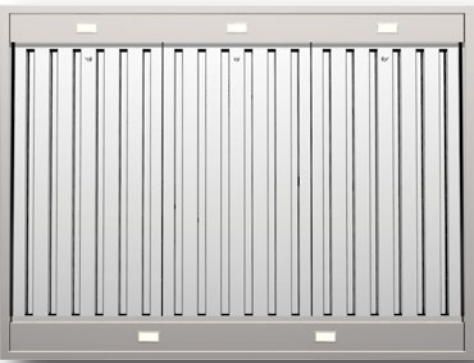

Dimensioned Drawing

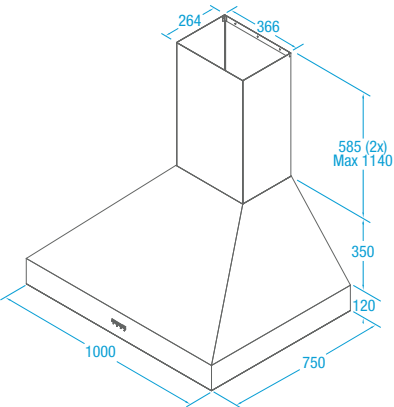

Model / Extraction Unit Selection			
X5M10S5.EPP		Alfresco Wall Hung Canopy KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System



Product Features	
Hood Mounting	Alfresco Wall Hung
Cooking Coverage	Suits 100cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 4x (H-25) - Dishwasher Safe
Lighting	LED 8x (1.0W)
Finish	AISI316 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length
Hood Width	1200mm
Hood Depth	750mm
Hood Height (Fascia)	120mm






Filtration Zone



Dimensioned Drawing

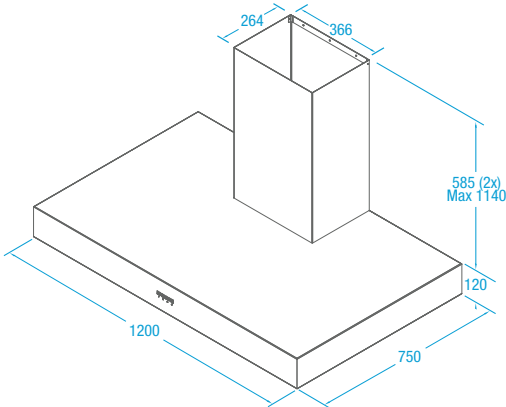

Model / Extraction Unit Selection			
X5N12S5.EPP	Alfresco Wall Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System




Product Features	
Hood Mounting	Alfresco Wall or Island Hung
Cooking Coverage	Suits 80cm - 100cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
Lighting	LED 5x (1.0W)
Finish	AISI316 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length
Hood Width	1000mm
Hood Depth	750mm
Hood Height (Fascia)	600mm






Filtration Zone

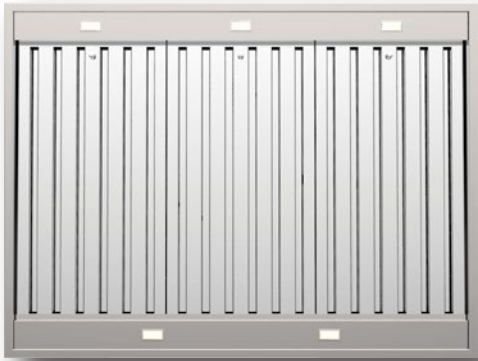

Dimensioned Drawing

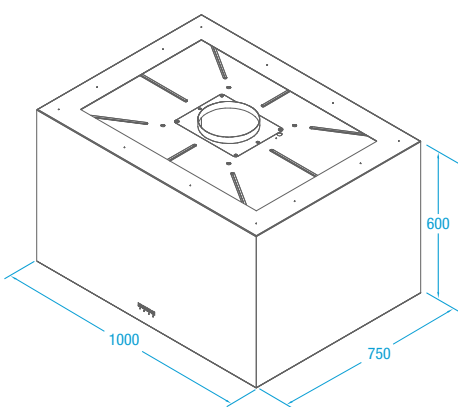

Model / Extraction Unit Selection			
X5C10S5.EPP	Alfresco Wall / Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System

NEW YORK 120 ISLAND




Product Features	
Hood Mounting	Alfresco Island Hung
Cooking Coverage	Suits 100cm - 120cm Cooking Surfaces
Filtration	S-Flow Baffle Filters 4x (H-25) - Dishwasher Safe
Lighting	LED 8x (1.0W)
Finish	AISI316 1.0mm High Grade Stainless Steel
Controls	LED Backlit 4 Button <i>mastermind</i> Electronic Control with LED Speed Indicator with Remote Controller
Speed Settings	3 Speed + Boost Mode
Timer Function	Programmable Timer (10min Increments) + Auto Shut Off After 2Hrs Of Inactivity
Ducting	200mm Acoustic Flexi Ducting - Five (5) Meter Length
Hood Width	1200mm
Hood Depth	750mm
Hood Height (Fascia)	120mm






Filtration Zone



Dimensioned Drawing

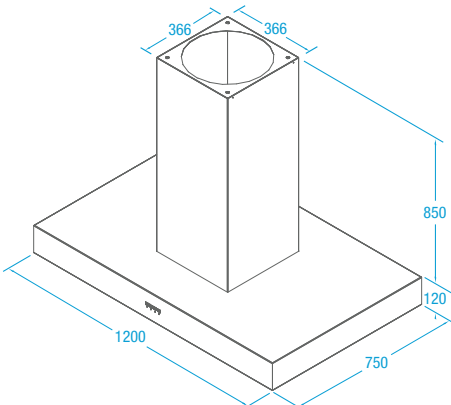

Model / Extraction Unit Selection			
X7N12S5.EPP	Alfresco Island Hung Canopy	KleenAir Pro Plus Remote Fan Solution - 2010 m³/hr	Remote External (Roof or Wall Mounted) Motor System

DON'T SETTLE FOR AN IMITATION.
WHISPAIR'S UNRIVALLED TECHNOLOGY
IS THE DIFFERENCE.



WHISPAIR'S INNOVATIVE
TECHNOLOGY EXPLAINED



5

YEAR WARRANTY

WHISPAIR ENDURANCE

mastermind
+H

The little black box that gives you peace of mind.

All Whispair rangehoods utilise the exclusive and sophisticated *mastermind* electronic system.


Offering an array of functions, such as an auto off timer and 'boost' speed, *mastermind* incorporates the finest electronic components available coupled with a fully embedded computer board to ensure that the 'intelligence' of every Whispair rangehood remains protected from even the most intensive styles of cooking. With *mastermind* you are assured that your rangehood will stand the test of time.

All Whispair indoor rangehoods are crafted from the highest quality AISI304 stainless steel (18% chrome & 8% nickel alloy composite) whilst the alfresco (BBQ) hood range is fabricated from AISI316 'marine grade' stainless steel.



Each manufacturing process is carefully carried out to ensure that the stainless steel remains without imperfection. All Whispair stainless steel is hand polished to perfection.

STAINLESS STEEL

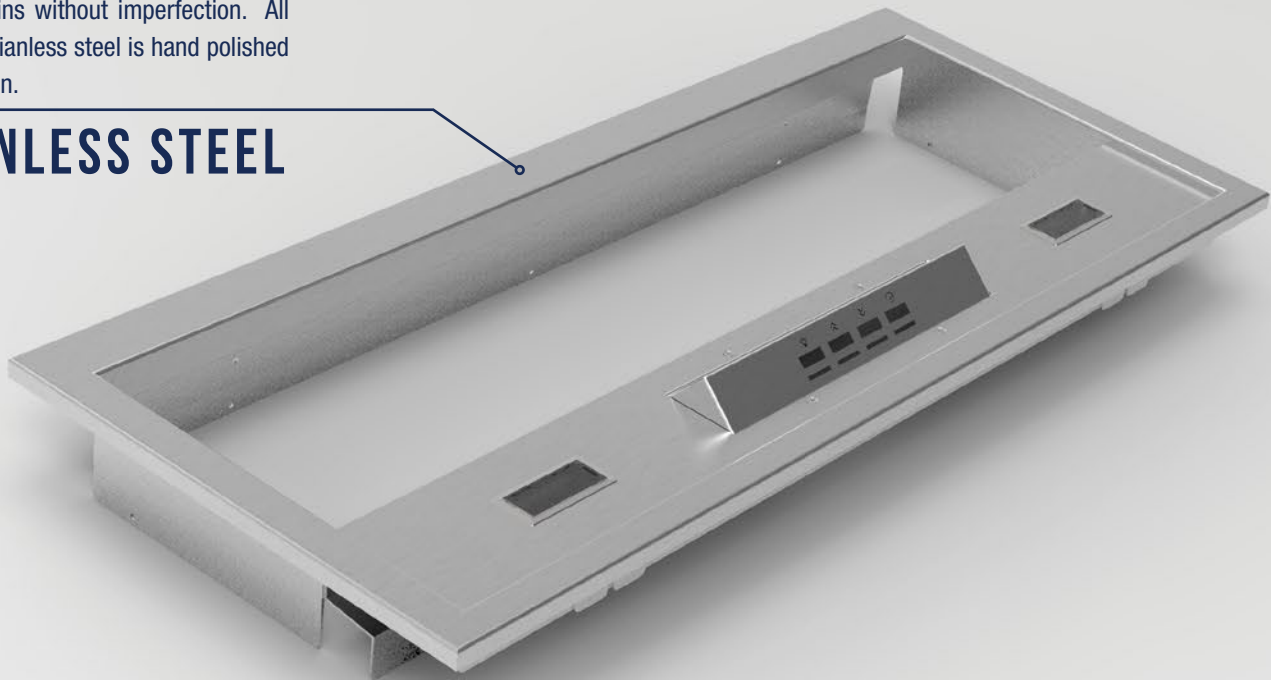

100% Stainless Steel
More robust and long lasting construction that can be maintained without deterioration

Thicker (25mm) commercial grade filters featured in all Whispair hoods



Odour and heat pass through the filter and are exhausted to the outside environment

Excess grease and moisture drips into lower channel or grease trap rather than on to the cooking surface

Hot air carries by-products from cooking surface


No Loss Of Extraction
Increased air flow is maintained even as the filter 'fills' with grease and oil

Heavier grease and moisture particles captured

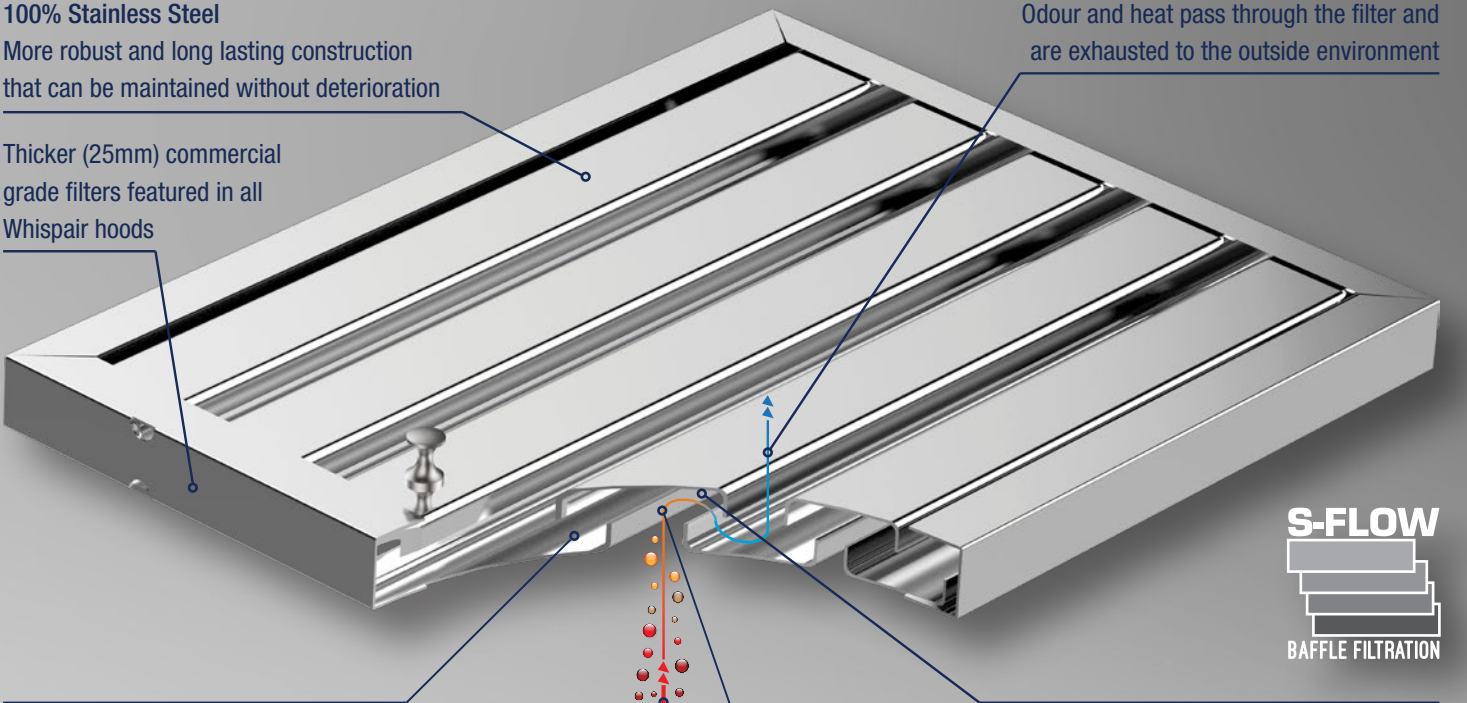

Baffle Filters. Why they are important to your kitchen.


- Rangehood filters are designed to capture two of the four by-products created during the cooking process - moisture and grease
- Other by-products such as heat and odour need to be evacuated completely from the home
- Baffle filters offer the best form of rangehood filtration
- Reduced air noise through the filtration zone when compare to conventional mesh filters
- Commonly found in commercial restaurant kitchens
- High grade 100% dishwasher safe stainless steel



ENERGY EFFICIENT LED LIGHTING

ENERGY EFFICIENT LED LIGHTING



Long lasting and highly energy efficient (1W) LED lights are found in all Whispair rangehoods. The LED lighting produces a warm radiance (Colour Temperature: 3100K) that brings out the natural colour and textures during the cooking process, whilst reducing the energy consumption by at least 98% over a traditional 60W incandescent globe. The rectangular shape of the LED diffuses the light to give full coverage across the cooking surface.

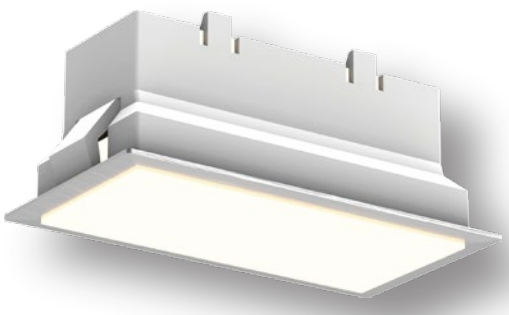

ULTRA 1680 EC MOTOR SYSTEM

- Delivers air movement of 1680m³/hr - more powerful than most "premium twin fan" systems
- Made in Germany
- Utilises the powerful and efficient electronically commutated ("EC") motor which eliminates the fans operating noise
- The primary benefit of KleenAir EC technology is the fan's ability to manage large system pressures (airflow resistance). This means the hood can sustain small filtration zones and longer ducting runs without compromising extraction performance
- The KleenAir EC motor is extremely quiet and can be up to 90% more efficient when compared to an AC equivalent
- Scroll housing designed to maximise flow rate

High Efficiency - High Air Flow - Low Operational Noise - Robust Design

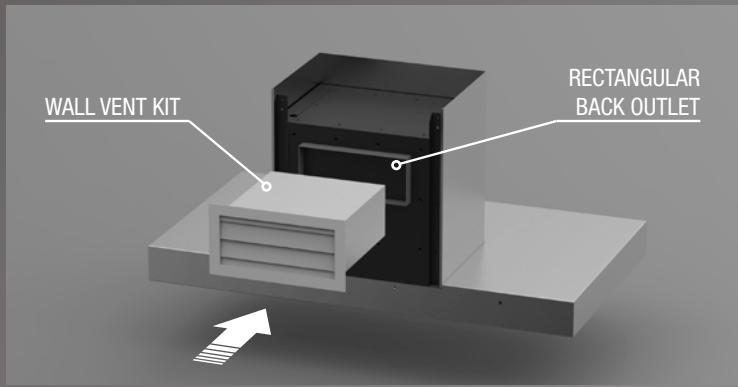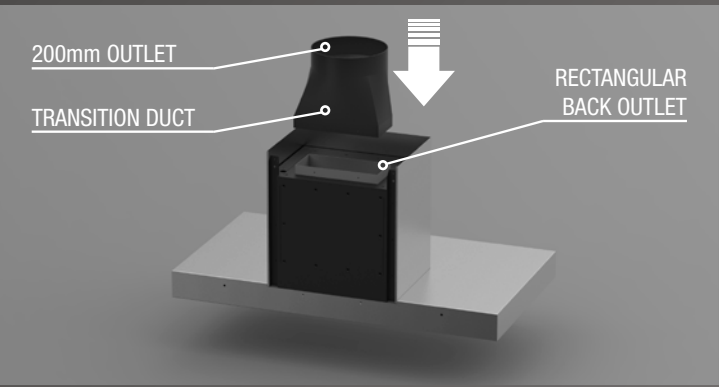

POWER 1020 MOTOR SYSTEM



- Delivers air movement of 1020m³/hr
- Made in Germany
- A premium motor solution that delivers exceptional extraction performance
- Optimised for high efficiency, good acoustic and vibration performance and a long service life
- Designed without compromise - Fan blower is specifically tailored to the needs of a range hood application
- 150mm Diameter Outlet

High Efficiency - High Air Flow - Low Operational Noise - Robust Design



OUTLET OPTIONS

The versatile design of Whispair hoods sees the exhaust outlet be able to be mounted on the top or rear. Although most installation would suit the outlet through the top of the hood, in some instances a rear installation is much more convenient.

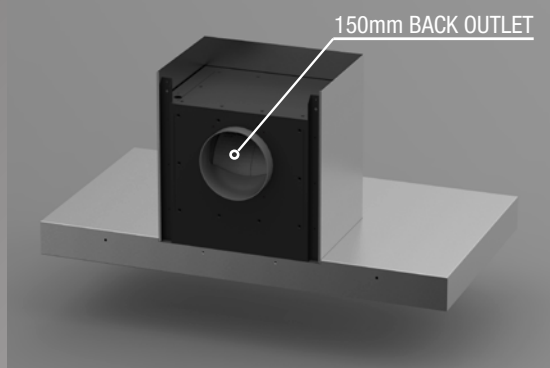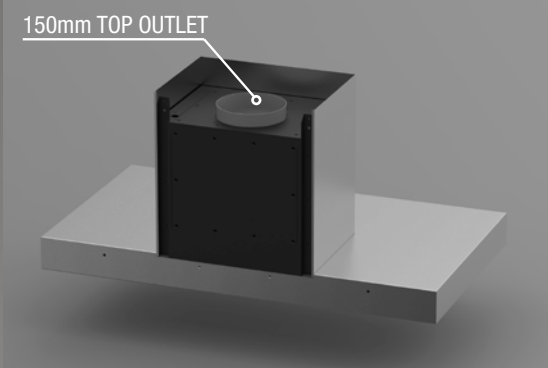

The KleenAir remote motor extraction system is unique in technology and superior in performance, delivering what other domestic extraction units can't.

Most conventional extraction fans used in domestic rangehood applications are designed to suck air in but struggle to expel the air due to the proximity of the motor in relation to the external vent.

KleenAir remote motor units are strategically placed near or at the end of the ducting to enable the distance from the motor to the external environment to be kept to a minimum.

Two housing variations combined with three German fan motor options provide several extraction and installation alternatives to satisfy most user requirements.



QUALITY GERMAN FAN MOTOR SYSTEM



Whispair's KleenAir fan technology utilise three quality German fan motors to offer varying performance alternatives.

The KleenAir Lite offers an 800m³/hr extraction rate and is available in two housing options. Similarly the KleenAir Pro is optioned with both housing solutions but offers a versatile 1140m³/hr extraction rate.

For the discerning user, the KleenAir Pro Plus was specifically designed for alfresco applications. Boasting a market leading 2010m³/hr extraction rate, the Pro Plus unit is only available in external (through roof or wall) mounted position.

Offering world leading Australian design, ingenuity and manufacture, Whispair together with the KleenAir remote motor technology personifies superior form and function.

1 EASY INSTALLATION

The *universal* KleenAir Inline unit is equipped with an anti-vibration mounting bar that enables for quick and easy installation.

The KleenAir External unit incorporates a detachable rigid duct that allows the installer to mount the light weight duct with ease before placing the top cowl and motor in place.

2 PROTECTIVE FINGER GUARD

The KleenAir External unit features a finger guard that protects users from coming into contact with the fan impeller during cleaning and maintenance.




3 QUALITY HOUSINGS

KleenAir units utilise only the highest grade materials to sustain even the toughest conditions forming a long lasting solution.

4 INLET CONE & GRID

KleenAir remote motor units are fitted with a specially designed and unrivalled inlet cone and grid. The contoured pieces are designed to manage the air flow into the impeller.

By controlling and directing the air flow efficiently, the inlet cone and grid minimise turbulence and reduce operating noise.

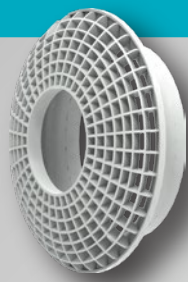

5 OPTIONAL WALL MOUNTING PLATE

A wall mounting plate (Model No. HBXP24) is available for fitting the KleenAir External unit to a wall. Utilising the plate provides protection to the wall finish whilst the contoured surface assists with directing air through the outlet.

6 PVC COATED FLEXIBLE ACOUSTIC DUCTING


All KleenAir remote motor systems come with 5 metres of PVC coated flexible ducting and stainless steel fixing clamps.

REMOTE FAN MOTOR SOLUTIONS - EXTERNAL UNIT

Product Features	
Motor Mounting	External - Through Roof or Wall Mount
Extraction Levels Available	Model: EL.800 Lite - 800 m³/hr (222 L/s @ 50pa)
	Model: EP.1140 Pro - 1140 m³/hr (317 L/s @ 50pa)
	Model: EPP.2010 Pro Plus - 2010 m³/hr (558L/s @ 50pa)
Finish	High Grade Galvanised Steel with Powder Coated Finish - Colour: Shale Grey
Ducting	200mm Acoustic (PVC Coated) Flexi Ducting Five (5) Metre Length Supplied
Duct Clamps	Dia. 200mm (Stainless Steel) - 2X Units Supplied
Fan Power Supply	Cable Length: Three (3) Metres
Sound Pressure Level (Outside)	EL.800: 50dB(A)* when operating at 'Boost' speed EP.1140: 56dB(A)* when operating at 'Boost' speed EPP.2010: 62dB(A)* when operating at 'Boost' speed * Outside Level @ 1M & System Pressure 50pa




External Motor Unit Through Roof

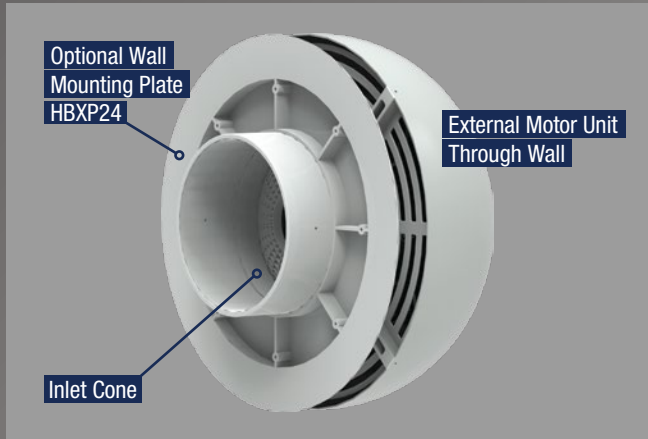

Optional Wall Mounting Plate HBXP24


External Motor Unit Through Wall

Inlet Cone

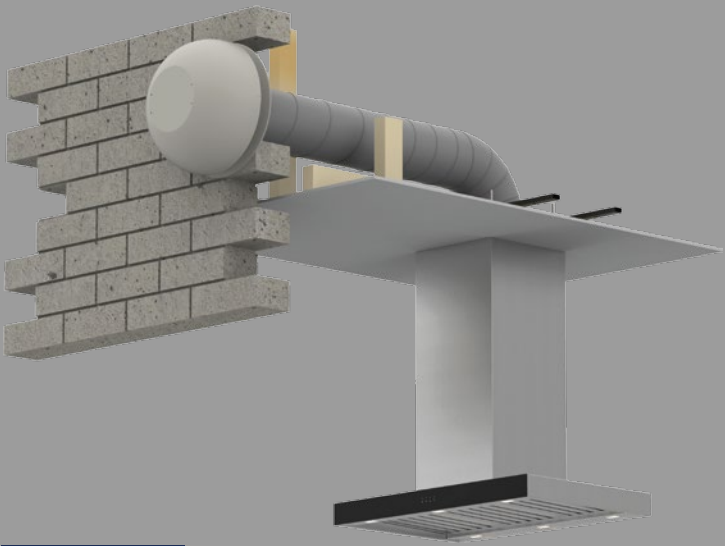


External Motor Unit Through Wall Installation Solution

External Motor Unit Through Roof Installation Solution

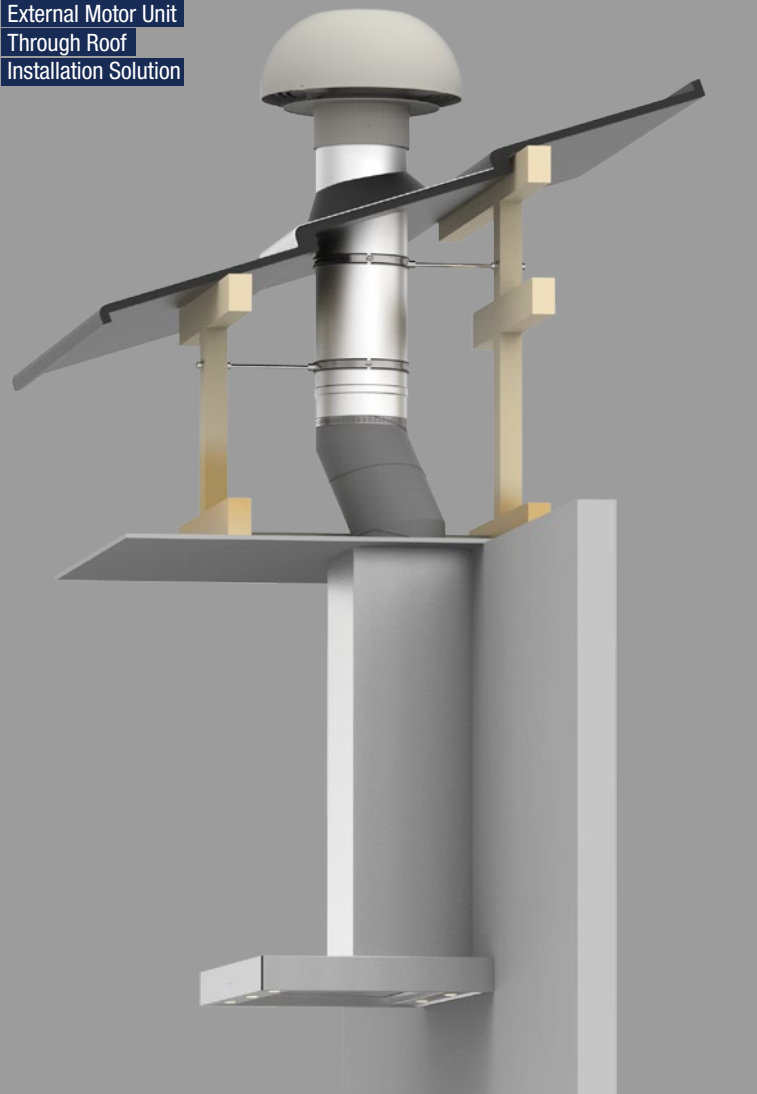

Product Features	
Motor Mounting	Inline - Through Wall or Eave
Extraction Levels Available	Model: IL.800 Lite - 800 m³/hr (222 L/s @ 50pa)
	Model: IP.1140 Pro - 1140 m³/hr (317 L/s @ 50pa)
Finish	High Grade FR ABS Plastic Colour: Shale Grey
Ducting	200mm Acoustic (PVC Coated) Flexi Ducting Five (5) Metre Length Supplied
Duct Clamps	Dia. 200mm (Stainless Steel) - 4X Units Supplied
Vent	Dia. 220mm Aluminium with fine mesh liner and Powder Coat Finish - Colour: White - 1X Unit Supplied
Fan Power Supply	Cable Length: Three (3) Metres
Sound Pressure Level (Outside)	IL.800: 52dB(A)* when operating at 'Boost' speed IP.1140: 58dB(A)* when operating at 'Boost' speed * Outside Level @ 1M & System Pressure 50pa

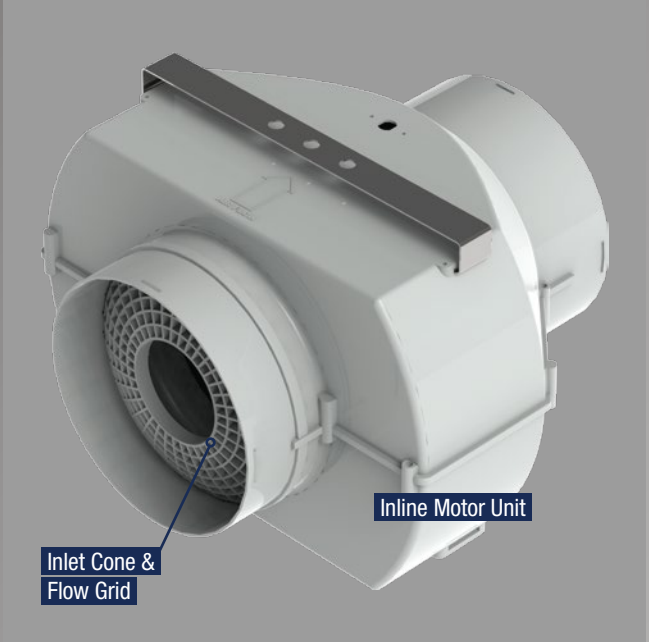


Inline Motor Unit

Inlet Cone & Flow Grid




DESIGNED & ASSEMBLED IN MELBOURNE

REMOTE FAN MOTOR SOLUTIONS - INLINE UNIT

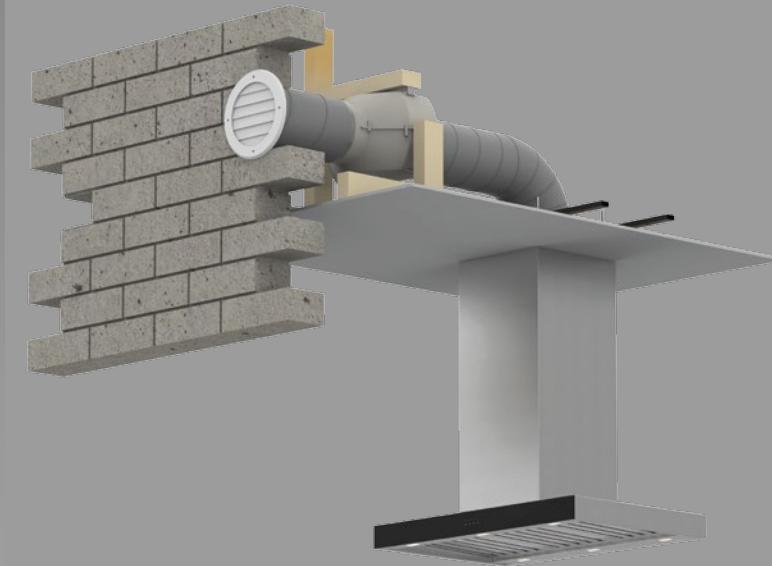

Inline Motor Unit External View


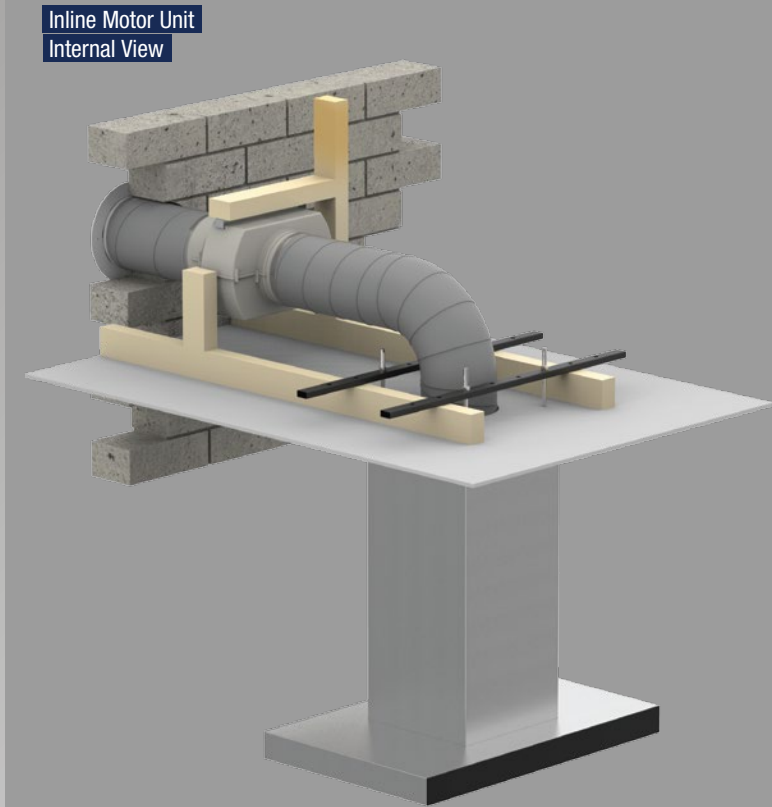


Inline Motor Unit Internal View

REMOTE FAN MOTOR INSTALLATION CONFIGURATIONS




EXTERNAL KLEENAIR
FAN MOTOR SOLUTION
Roof (Upper) and
Wall (Lower) Mounted

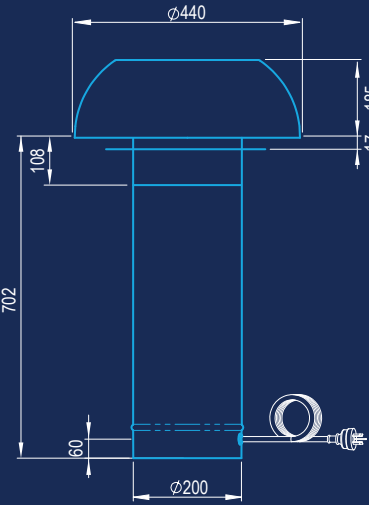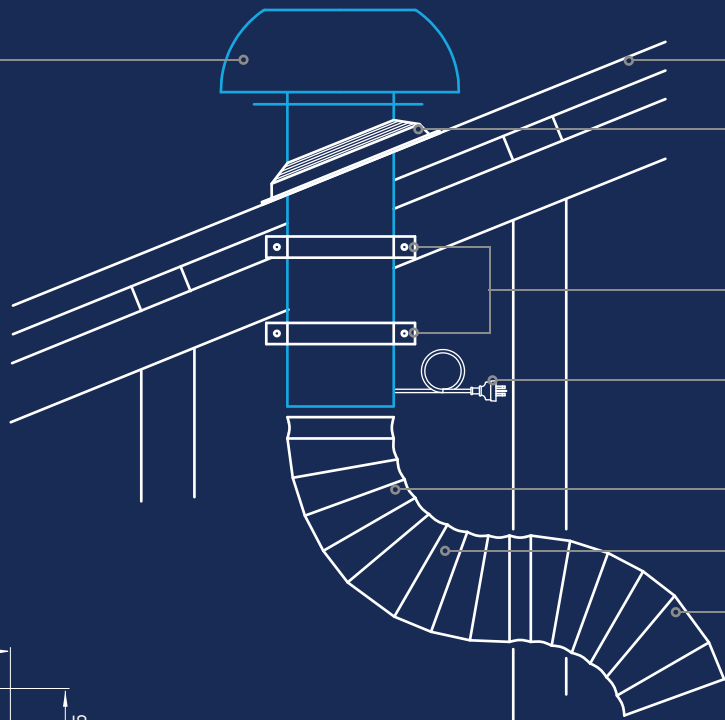



- Roof
- Flashing to suit Metal or Tile Roof (Optional Accessory)
HBX200TILE - Suits Tile Roof
HBX200MET - Suits Metal Roof
- Housing Mounts (Optional Accessory)
- Fan Power Supply (3mtr) Attach to Internal Hood Unit
- Ducting Pulled Tight
- Gentle Bend In Ducting
- 200mm Ducting Attach to Internal Hood Unit Outlet

- Wall
- Fan Power Supply (3mtr) Attach to Internal Hood Unit
- Gentle Bend In Ducting
- Optional Wall Mounting Plate (HBXP24)
- Ducting Pulled Tight
- 200mm Ducting Attach to Internal Hood Unit Outlet

INLINE KLEENAIR
FAN MOTOR SOLUTION
Eave (Upper) and
Wall (Lower) Vented

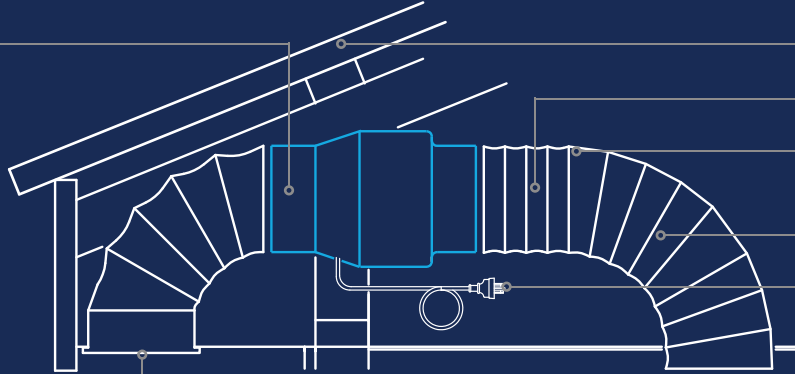

- Roof
- Ducting Pulled Tight
- 200mm Ducting Attach to Internal Hood Unit Outlet
- Gentle Bend In Ducting
- Fan Power Supply (3mtr) Attach to Internal Hood Unit

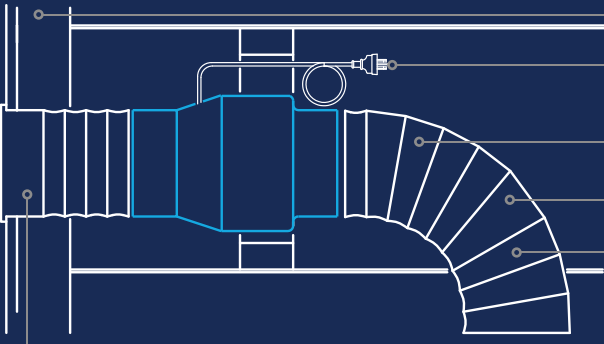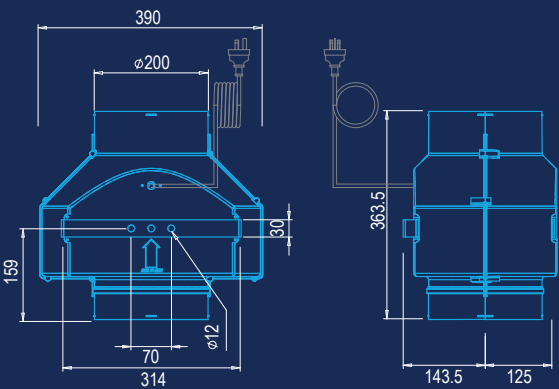


- Vent & Eave
- Wall
- Fan Power Supply (3mtr) Attach to Internal Hood Unit
- Gentle Bend In Ducting
- Ducting Pulled Tight
- 200mm Ducting Attach to Internal Hood Unit Outlet


Vent

OPTIONAL INSTALLATION ACCESSORIES


HBX200TILE - REMOTE MOTOR INSTALL KIT TO SUIT TILE ROOF

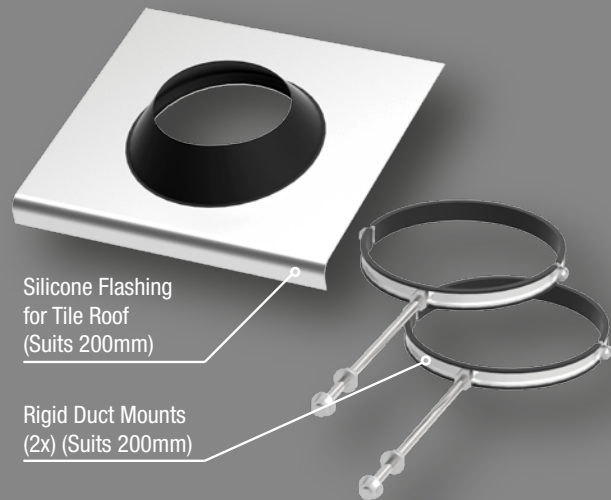

HBX200MET - REMOTE MOTOR INSTALL KIT TO SUIT METAL ROOF

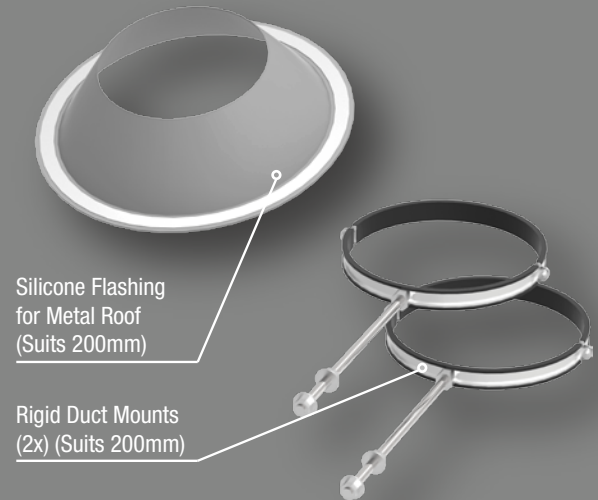

REMOTE MOTOR ROOF INSTALLATION

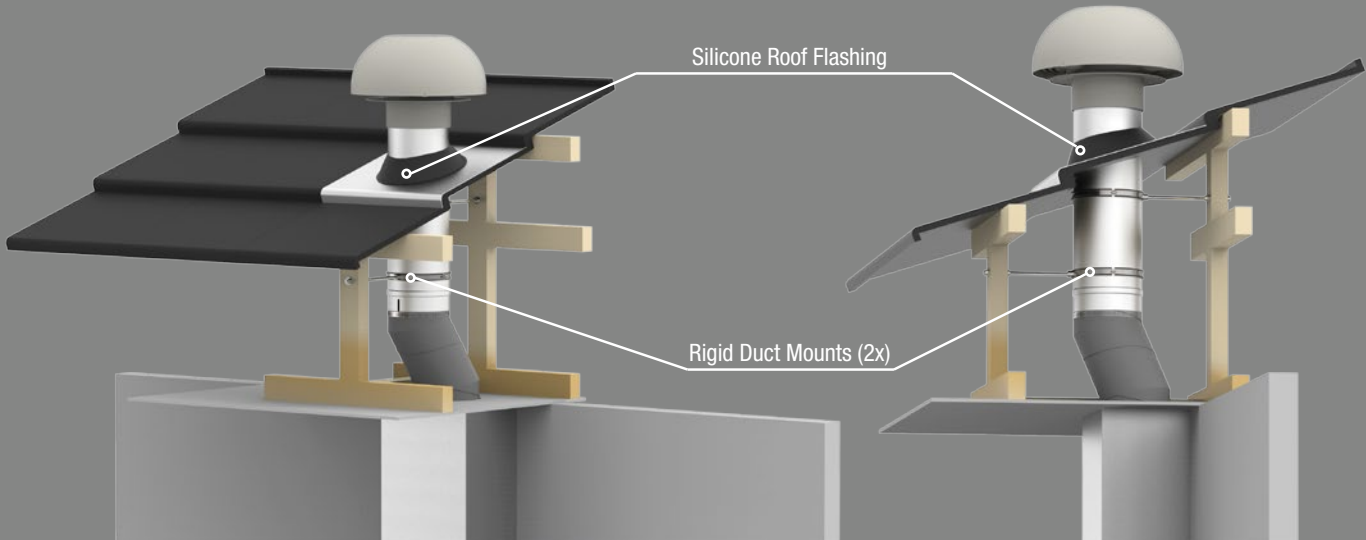

TERMS & CONDITIONS
Due to ongoing research and development, the manufacturer reserves the right to change specifications without notice. If specifications are critical to end use, please ask your local retail agent. This information is provided without prejudice to the standard terms and conditions of the sale of the distributor. This brochure supersedes all previous brochures. All due care has been taken while compiling this brochure at the time of print, however no responsibility is taken for error.

"Whispair", "KleenAir" and "S-Flow" are registered trademarks of Haus Group Holdings Pty Ltd. Whispair is proudly Australian owned.

All material issued is Copyright © 2018. No material can be reproduced without written permission of Haus Group Australia Pty Ltd or Haus Group New Zealand Ltd.

Issued March 2018.

WARRANTY
All Whispair rangehoods and on board fan motors come with a 5-Year parts and labour warranty.



All Whispair remote fan motor solutions come with a 10-Year replacement warranty.

