

Specifications	
Model No.	X3T16S
Hood Mounting	Undermount
Dimensions	Hood Width 1560mm
	Hood Depth 480mm
	Hood Height 660mm
Cooking Surface Coverage (cm)	120-160cm
Min Install Height	800mm
Recommended Install Height	800mm
Induction Suitable	●
Char Grill Suitable	●

Finish	AISI304 1.2mm Food Grade	-
	AISI316 1.2mm Marine Grade	●

Filtration	Type: S-Flow Baffle	●
	Filter Quantity	4



Electronics	MasterMind	●
	Controls	4-Button Backlit LED MasterMind Electronic Control
	Wireless Remote	○
	Speed Settings	3 Speed + Boost Mode
	Timer Function	Programmable Timer 10min Increments
Auto Fan Shut Off	Auto Off After 2-Hours Of Inactivity	

Lighting	Type: LED - Warm White	●
	Type: LED - Cool White	○
	Lamp Quantity	8
	Front Panel	●
	Rear Panel	●

Exhaust	Outlet Position - Top	●
	Outlet Position - Rear	○
	Outlet Quantity	2
	Ducting (Remote Motor)	Ziliikon Duct - Dia. 200mm 5M Length Supplied
Ducting (Onboard Motor)	Ultra Motor - Dia.200mm Not Supplied - Duct Kits Available	

SELECT YOUR HOOD & MOTOR COMBINATION		X3T16S5 / X3T16S6	
On Board	Power 1020 - Top	1020m³/hr	--
	Power 1020 - Rear	1020m³/hr	--
	Ultra 1680 - Top	1680m³/hr	.20U/T
	Ultra 1680 - Rear	1680m³/hr	.20U/B
Inline	Lite 800	800m³/hr	--
	Pro 1140	1140m³/hr	.2IP
External	Lite 800	800m³/hr	--
	Pro 1140	1140m³/hr	.2EP
	Pro Plus 2010	2010m³/hr	.2EPP

● Standard Inclusion ○ Optional - Not Available

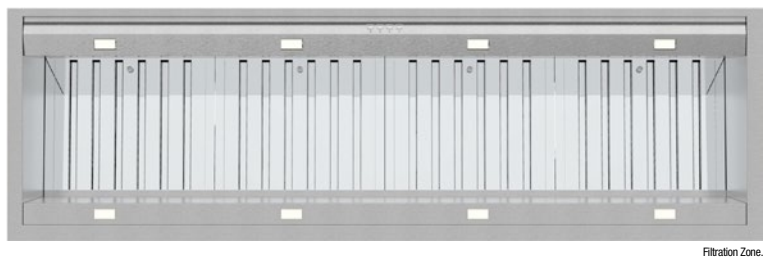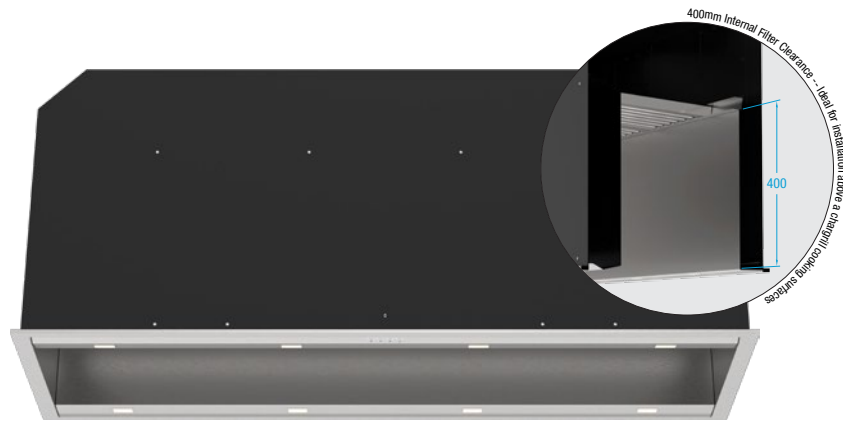

Your Hood. Your Colour. Your Way. Select your hood finish.



Dimensioned Drawing

